



# 2010 Air Quality Progress Report for Ards Borough Council

In fulfillment of the Environment (Northern Ireland) Order  
2002 - Local Air Quality Management

April 2010

|                                |  |
|--------------------------------|--|
| <b>Local Authority Officer</b> | Marguerite Morris<br>Environmental Health Officer<br><br>Gareth Kinnear<br>Senior Environmental Health Officer |
|--------------------------------|--|

|                   |  |
|-------------------|--|
| <b>Department</b> | Environmental Health   |
| <b>Address</b>    | 2 Church Street, Newtownards<br>Co Down BT23 4AP   |
| <b>Telephone</b>  | 02891824051  |
| <b>e-mail</b>     | <a href="mailto:marguerite.morris@ards-council.gov.uk">marguerite.morris@ards-council.gov.uk</a><br><a href="mailto:gareth.kinnear@ards-council.gov.uk">gareth.kinnear@ards-council.gov.uk</a> |

|                                |                      |
|--------------------------------|----------------------|
| <b>Report Reference number</b> | Progress Report 2010 |
| <b>Date</b>                    | April 2010           |

## Executive Summary

Increasing priority has been given at both European and National Levels to the assessment and the management of air quality. The Air Quality Strategy has established the frame work for air quality management in the UK. Local Authorities have a duty under the Environment Act 1995 to assess air quality and produce an annual report, action is required in areas where the objectives are or are likely to be exceeded.

Air Quality in Northern Ireland has shown substantial improvement in recent years. In particular levels of pollutants associated with coal and oil combustion have declined significantly over the past decade. Locally the NIHE has completed a fuel conversation scheme over the past 3 years which has dramatically reduced the number of coal burning properties in Newtownards.

This Progress Report has been undertaken in accordance with the Local Air Quality Technical Guidance TG>09. It forms part of a continual process of review and assessment of local air quality and provides an opportunity to update information on the pollution climate and to reassess conclusions from previous assessments.

Within this report sources of pollution in the Borough have been re-examined and any aspects that have changed since the previous round of review and assessment have been identified. New monitoring data has been used to assess compliance with the relevant national air quality objectives. The conclusions from the previous round of review and assessment continue to be valid and there is no need to proceed to a detailed assessment for any of the monitored pollutants.

## Table of contents

|          |  |           |
|----------|--|-----------|
| <b>1</b> | <b>Introduction</b>  | <b>5</b>  |
| 1.1      | Description of Local Authority Area                          | 5         |
| 1.2      | Purpose of Progress Report                                   | 5         |
| 1.3      | Air Quality Objectives                                       | 6         |
| 1.4      | Summary of Previous Review and Assessments                   | 8         |
| <b>2</b> | <b>New Monitoring Data</b>                                   | <b>10</b> |
| 2.1      | Summary of Monitoring Undertaken                             | 10        |
| 2.2      | Comparison of Monitoring Results with Air Quality Objectives | 15        |
| <b>3</b> | <b>New Local Developments</b>                                | <b>27</b> |
| <b>3</b> | <b>Conclusions and Proposed Actions</b>                      | <b>29</b> |
| 3.1      | Conclusions from New Monitoring Data                         | 29        |
| 3.2      | Proposed Actions   | 29        |
| <b>4</b> | <b>References</b>  | <b>31</b> |
| <b>5</b> | <b>Appendices</b>  |           |

# 1 Introduction

## 1.1 Description of Local Authority Area

Ards Borough Council is situated east of Belfast on the shores of Strangford Lough, which is designated as an area of outstanding natural beauty and special scientific interest. The Borough comprises of 140 square miles, bounded by 90 miles of coastline. Ards remains one of the fastest growing boroughs with the Northern Ireland Statistics and Research Agency Mid 2006 population estimates standing at 76,179 representing 4.4% of the total population of Northern Ireland.

The Borough is of mixed urban and rural character. The main town of Newtownards is located at the northern end of Strangford Lough and is a natural basin surrounded by hills. The prevailing wind direction is south-westerly. The other main centres of population include Comber, Donaghadee and Portaferry. Neighbouring Councils include North Down Borough Council, Castlereagh Borough Council and Down District Council.

Map of Borough:



## 1.2 Purpose of Progress Report

Progress Reports are required in the intervening years between the three-yearly Updating and Screening Assessment reports. Their purpose is to maintain continuity in the Local Air Quality Management process.

They are not intended to be as detailed as Updating and Screening Assessment Reports, or to require as much effort. However, if the Progress Report identifies the

risk of exceedence of an Air Quality Objective, the Local Authority (LA) should undertake a Detailed Assessment immediately, and not wait until the next round of Review and Assessment.

### **1.3 Air Quality Objectives**

The air quality objectives applicable to LAQM in **Northern Ireland** are set out in the Air Quality Regulations (Northern Ireland) 2003, Statutory Rules of Northern Ireland 2003, no. 342, and are shown in Table 1.1. This table shows the objectives in units of microgrammes per cubic metre  $\mu\text{g}/\text{m}^3$  (milligrammes per cubic metre,  $\text{mg}/\text{m}^3$  for carbon monoxide) with the number of exceedences in each year that are permitted (where applicable).

**Table 1.1 Air Quality Objectives included in Regulations for the purpose of Local Air Quality Management in Northern Ireland.**

| <b>Pollutant</b>                                 | <b>Concentration</b>  | <b>Measured as</b>  | <b>Date to be achieved by</b> |
|--|---|---------------------|-------------------------------|
| <b>Benzene</b>                                   | 16.25 $\mu\text{g}/\text{m}^3$  | Running annual mean | 31.12.2003                    |
|  | 3.25 $\mu\text{g}/\text{m}^3$   | Running annual mean | 31.12.2010                    |
| <b>1,3-Butadiene</b>                             | 2.25 $\mu\text{g}/\text{m}^3$   | Running annual mean | 31.12.2003                    |
| <b>Carbon monoxide</b>                           | 10.0 $\text{mg}/\text{m}^3$   | Running 8-hour mean | 31.12.2003                    |
| <b>Lead</b>                                      | 0.5 $\mu\text{g}/\text{m}^3$  | Annual mean         | 31.12.2004                    |
|  | 0.25 $\mu\text{g}/\text{m}^3$   | Annual mean         | 31.12.2008                    |
| <b>Nitrogen dioxide</b>                          | 200 $\mu\text{g}/\text{m}^3$ not to be exceeded more than 18 times a year   | 1-hour mean         | 31.12.2005                    |
|  | 40 $\mu\text{g}/\text{m}^3$   | Annual mean         | 31.12.2005                    |
| <b>Particles (PM<sub>10</sub>) (gravimetric)</b> | 50 $\mu\text{g}/\text{m}^3$ , not to be exceeded more than 35 times a year  | 24-hour mean        | 31.12.2004                    |
|  | 40 $\mu\text{g}/\text{m}^3$   | Annual mean         | 31.12.2004                    |
| <b>Sulphur dioxide</b>                           | 350 $\mu\text{g}/\text{m}^3$ , not to be exceeded more than 24 times a year | 1-hour mean         | 31.12.2004                    |
|  | 125 $\mu\text{g}/\text{m}^3$ , not to be exceeded more than 3 times a year  | 24-hour mean        | 31.12.2004                    |
|  | 266 $\mu\text{g}/\text{m}^3$ , not to be exceeded more than 35 times a year | 15-minute mean      | 31.12.2005                    |

## 1.4 Summary of Previous Review and Assessments

This Progress Report is the second report in round four of the staged Review and Assessment process undertaken by all local authorities in the UK. The first round consisted of four stages which resulted in a number of authorities declaring air quality management areas (AQMAs) for particular pollutants and producing action plans to address air quality issues. The second and third rounds consisted of a series of USA reports and detailed assessments where required, to ensure that the AQMAs and action plans are kept up to date.

### **The stage one review and assessment completed in 2000 concluded that:**

1. The air quality objectives for the following pollutants were not likely to be exceeded:

*Benzene, 1,2- Butadiene and Lead*

2. A detailed assessment was required for the following pollutants:

*Carbon Monoxide, Sulphur Dioxide, Nitrogen dioxide and PM<sub>10</sub>*

### **The stage two & three assessment completed in 2004 concluded that:**

1. The air quality objectives for the following pollutants were not likely to be exceeded:

*Carbon Monoxide, Nitrogen Dioxide, and Sulphur Dioxide*

2. Based on the predictions of the dispersion modelling exercise it was identified that the objective for the following pollutant would be marginally exceeded:

*PM<sub>10</sub>*

The area of predicted PM<sub>10</sub> exceedence was identified to be within the area of Bradshaw's Brae, based on the findings of the dispersion modelling exercise. The modelling was undertaken by BMT Cordah on behalf of the Council during 2003/2004. The findings were in part based on the real time monitoring for PM<sub>10</sub> at the Glen Community Centre in Newtownards, and on a fuel usage survey carried out in April 2003. BMT Cordah concluded that the NAQS 24 hour mean would be marginally exceeded, as a result of the high level of domestic coal burning in the town.

The Council therefore declared an AQMA, and produced an action plan as a means to improve air quality in Newtownards. The AQMA encapsulated the areas within Newtownards that had the highest density of dwellings using solid fuel burning as the primary source of heating. The automatic monitoring station was relocated to a site within the AQMA, to confirm the findings of the dispersion modelling exercise. Initially there were some difficulties in finding a suitable location; however, the monitoring

station was moved to a site within the grounds of Ards Leisure Centre during the spring of 2006. Information relating to the site, including the latest monitoring data, can be accessed at <http://www.airqualityni.co.uk>. The monitoring from this location indicated that it was unlikely that the objective for PM10 will be exceeded. As a result Ards Borough Council revoked the AQMA on 1<sup>st</sup> December 2007.

In addition it was felt it would be beneficial to identify any major changes in fuel consumption within the AQMA. A consultation exercise was undertaken with the Northern Ireland Housing Executive (NIHE), to assess the amount of fuel conversion carried out within their properties since 2003. An estimated 859 properties were converted between 2003 and 2009, which has significantly reduced the emissions from domestic coal burning properties within the town.

A progress report was completed in 2008 and an Updating and Screening Assessment 2009, both reports re-examined the possible pollution sources within the borough and any aspects that had changed since the previous round of review and assessment were identified. Monitoring data for the relevant years was used to assess compliance with the relevant national air quality objectives. The conclusions from the previous rounds of review and assessment were found to be valid and a detailed assessment was therefore not required. No exceedences of the objectives were identified in 2008 or 2009.

## **2 New Monitoring Data**

### **2.1 Summary of Monitoring Undertaken**

From mid 2002 until April 2006, an automatic monitoring station was located at an urban background Estate, Newtownards, to monitor pollutants from the high density of domestic coal burning properties in the area. PM<sub>10</sub> is monitored using an automatic TEOM sampler and sulphur dioxide is monitored using a UV fluorescence analyser. Modelling carried out for the combined 2<sup>nd</sup>/3<sup>rd</sup> review indicated the possibility of exceedence of the PM<sub>10</sub> objective. As a result an AQMA was declared in 2005 and the automatic monitoring station was moved to a location within the area of predicted exceedence in April 2006. The station is now located at the rear of Ards Leisure Centre, William Street, Newtownards. The monitoring results from this location indicate that it is unlikely that the objectives for PM<sub>10</sub> or Sulphur Dioxide would be exceeded.

The reference method for PM<sub>10</sub> is the gravimetric technique, in which the ambient concentration of PM<sub>10</sub> is calculated from the mass of particulate matter collected on a filter. The TEOM has been found to underestimate relative to this reference method. As a result data obtained from the TEOM sampler has been multiplied by a factor of 1.3 to give the gravimetric equivalent.

#### **Quality Assurance and Quality Control**

Environmental Monitoring System (EMS) the supplier of the automated Sulphur Dioxide and PM<sub>10</sub> analysers are currently contracted to undertake routine servicing and maintenance of the equipment. This aims to ensure a high percentage of data capture due to reduced delays in the execution of repairs, in the event of equipment breakdown.

The Council has engaged the services of NETCEN to undertake independent 6 – monthly calibrations. NETCEN is also responsible for data management which involves downloading data directly from the site on a daily basis and validating the data to provide reports at regular intervals. Any irregularities are notified immediately to the Council and officers can take measures to rectify any problems or notify EMS to carry out repairs if necessary. The Councils air quality officers undertake routine calibration and maintenance of the equipment following the QA/QC procedures set out by NETCEN. A data capture rate of 90% for ratified data is specified in the technical guidance and is the recommended as a target for automatic monitoring.

**Table 2.1 Details of Automatic Monitoring Sites**

| Site Name           | Site Type        | OS Grid Ref |        | Pollutants Monitored | Monitoring Technique    | In AQMA? | Relevant Exposure?<br>(Y/N with distance (m) to relevant exposure) | Distance to kerb of nearest road<br>(N/A if not applicable) | Does this location represent worst-case exposure? |
|---------------------|------------------|-------------|--------|----------------------|-------------------------|----------|--|---|---|
| Ards Leisure Centre | Urban Background | 348469      | 374516 | PM10<br>SO2          | TEOM<br>SO2<br>Analyser | No       | N  | N/A   | Y   |

**Non-Automatic Monitoring****Sulphur Dioxide:**

In November 2000, a semi-automatic eight-port bubbler was installed within the Scrabo Estate in Newtownards. This area at the time was identified as an area with high density of domestic coal burning properties, the number of properties using coal has since decreased significantly over the past 10 years. The 8-port bubbler apparatus was originally used to measure both sulphur dioxide and suspended particulate matter as black smoke, however, since 2007 it has only been used for black smoke. This method does not allow direct comparison with the National Air Quality Objectives, however it was a useful indicative measurement, although due to the unavailability of replacement parts, the site was decommissioned January 2010.

**Nitrogen Dioxide:**

Ards Borough Council has monitored Nitrogen Dioxide by passive diffusion tubes regularly since 1994. Diffusion tube data cannot be compared directly with air quality limit values based on short-term averages; however, they can be used to help identify areas with high concentrations of NO<sub>2</sub>, which require more detailed investigation. The aim of the NO<sub>2</sub> monitoring undertaken has been to measure pollutant concentrations at busy roads and junctions especially near residential areas. The tubes are sited using guidelines from NETCEN but are not part of the monitoring network.

**Table 2.2 Details of Non- Automatic Monitoring Sites**

| Site Name      | Site Type        | OS Grid Ref |        | Pollutants Monitored | In AQMA ? | Relevant Exposure? (Y/N with distance (m) to relevant exposure) | Distance to kerb of nearest road (N/A if not applicable) | Worst-case Location? |
|----------------|------------------|-------------|--------|----------------------|-----------|---|--|----------------------|
| 2a East Street | Urban Background | 349001      | 374242 | Nitrogen Dioxide     | N         | Y   | >50m from busy road                                      | Y                    |
| Islandmore     | Urban Background | 349847      | 375132 | Nitrogen Dioxide     | N         | Y   | >50m from busy road                                      | Y                    |
| Bangor Road    | Roadside         | 349607      | 374267 | Nitrogen Dioxide     | N         | Y   | 1.5m   | Y                    |
| Talbot Street  | Roadside         | 348994      | 374553 | Nitrogen Dioxide     | N         | Y   | 1.5m   | Y                    |
| Church Street  | Roadside         | 348123      | 374364 | Nitrogen Dioxide     | N         | Y   | 1.5m   | Y                    |
| Court Street   | Roadside         | 348945      | 373928 | Nitrogen Dioxide     | N         | N   | 1.5m   | N                    |
| Scрабо Fold    | Urban Background | 348238      | 373590 | Particulates         | N         | N/A   | >50m from busy road                                      | Y                    |

### Quality Assurance and Quality Control

All six of the Nitrogen Dioxide Tubes are sited in accordance with the NETCEN guidelines; however, there is no longer a national monitoring network. The NO<sub>2</sub> tubes are supplied by Gradko Analysed by Casella, (preparation method 20% TEA in water), which is a UKAS recognised laboratory for the provision and analysis of diffusion tubes. They participate in the Work Place Analysis Scheme for Proficiency ( WASP) for NO<sub>2</sub>. This scheme is an independent proficiency testing scheme operated by the Health and Safety Laboratory (HSL). Each month a diffusion tube doped with nitrite is distributed to each participating laboratory; participants then analyse the tube and report the result to the HSL. The nominal mass of nitrite on the doped tubes is different each month, and is intended to reflect the range encountered in actual monitoring.

The Technical guidance states that diffusion tube data should be appropriately bias corrected. Unfortunately the Council does not carry out continuous monitoring for NO<sub>2</sub>, therefore can not undertake a collocation study. After consultation with the air quality officer for the Eastern Group it was decided that the Cassella's national standard bias adjustment factor for 2009 should be used. The overall correction factor for 2009 is 0.81 which was based on eight co-located studies throughout the UK. Information on the correction factor can be obtained at:

[www.uwe.ac.uk/aqm/review/R&Asupport/diffusiontube.2009](http://www.uwe.ac.uk/aqm/review/R&Asupport/diffusiontube.2009)

For Casella 2009 the diffusion tube precision is shown to be good, further information on the precision results for nitrogen dioxide diffusion tube collocation studies can be viewed at

[www.uwe.ac.uk/aqm/review/R&Asupport/tube\\_precision2009\(\(eb%2009\)pdf](http://www.uwe.ac.uk/aqm/review/R&Asupport/tube_precision2009((eb%2009)pdf)

## 2.2 Comparison of Monitoring Results with Air Quality Objectives

### Nitrogen Dioxide

| Pollutant        | Objective  | Date to be achieved by         |
|------------------|--|--------------------------------|
| Nitrogen Dioxide | 200ug/m <sup>3</sup> hourly mean<br>not to be exceeded >18 times<br>per year | 31 <sup>st</sup> December 2005 |
|                  | 40ug/m <sup>3</sup> annual mean  | 31 <sup>st</sup> December 2005 |

Nitrogen dioxide (NO<sub>2</sub>) and Nitrogen oxide (NO) are both oxides of nitrogen and are collectively referred to as Nox. All combustion processes produce Nox emissions largely in the form of nitric oxide which is converted to nitrogen dioxide, mainly as a result of reactions with ozone in the atmosphere. It is Nitrogen Dioxide which is of most concern, as it is respiratory irritant.

The principal source of nitrogen dioxide is road transport. Major Roads carrying large volumes of high speed traffic are major contributors, as are city centres with congested streets. Other significant sources of nitrogen oxides emissions include power stations and domestic sources.

The conclusion from the previous round of review and assessment continues to be valid, and it is not necessary to proceed to a detailed assessment.

### Diffusion Tube Monitoring Data

There is currently 6 diffusion tubes located throughout the town of Newtownards, all results from 2001-2009 are contained within appendix one. In 2007 it was decided to relocate the tube at the Town Hall, to 2a East Street, Newtownards and the tube at Ashgrove Avenue, to Church Street Newtownards as it felt there was no relevant exposure at either site.

The 2009 results (annual average) show no exceedences of the National Air Quality objective. Although the Court Street 2009 result is just above the national standard, there is currently no relevant exposure at this location. However, this location is considered to be the best possible location to allow for monitoring of the change in traffic flow with the construction of the new A20 Newtownards Southern Relief Road which was completed 2009, this involved the construction of a 2.0km new link road, from the A20 Blaire Main Road South to the A21 Comber to the Portaferry Road, Newtownards. Following a recent discussion with the air quality officer a site visit is due to be carried out over the next weeks to identify a suitable location of relevant exposure within this area.

The results for the past 3 years do not show any particular trends. Annual variation is more likely to be as a result of climatic conditions, rather than changes in emissions.

**Table 2.3 Results of Nitrogen Dioxide Diffusion Tubes for 2009**

| Site ID | Location          | Within AQMA? | Data Capture 2009 % | Annual mean concentrations                                  |
|---------|-------------------|--------------|---------------------|---|
|         |                   |              |                     | 2009 ( $\mu\text{g}/\text{m}^3$ )<br>Adjusted for bias 0.81 |
| ABC1    | East Street       | N            | 100                 | 21  |
| ABC2    | Court Street      | N            | 100                 | 41  |
| ABC3    | Donaghadee Road   | N            | 100                 | 32  |
| ABC4    | Islandmore Avenue | N            | 90                  | 12  |
| ABC5    | Church Street     | N            | 100                 | 28  |
| ABC6    | Talbot Street     | N            | 100                 | 32  |

**Table 2.4 Results of Nitrogen Dioxide Diffusion Tubes 2007-09**

| Site ID | Location          | Within AQMA? | Annual mean concentrations ( $\mu\text{g}/\text{m}^3$ )<br>Adjusted for bias |      |      |
|---------|-------------------|--------------|--|------|------|
|         |                   |              | 2007   | 2008 | 2009 |
|         |                   |              |  |      |      |
| ABC1    | East Street       | N            | -  | -    | 21   |
| ABC2    | Court Street      | N            | 35.7   | 39   | 41   |
| ABC3    | Donaghadee Road   | N            | 23.9   | 27.4 | 32   |
| ABC4    | Islandmore Avenue | N            | 10.6   | 12.6 | 12   |
| ABC5    | Church Street     | N            | -  | -    | 28   |
| ABC6    | Talbot Street     | N            | -  | 19.9 | 25   |
| ABC7    | Town Hall         | N            | 43.2   | 43.9 | -    |
| ABC8    | Ashmore           | N            | 12.3   | 12.3 | -    |

**\*Bias adjustment factors used**

**2006 0.87**  
**2007 0.92**  
**2008 0.82**  
**2009 0.81**



**PM<sub>10</sub>**

Particulate matter is often associated with a range of medical conditions including effects on the respiratory and cardiovascular systems and asthma. Particulate matter in the atmosphere is composed of a wide range of material of various origins. PM<sup>10</sup> is the description given to particles falling below 10µm in diameter.

There are a wide range of emission in the UK which can be divided into three main categories:

1. Primary particle emissions – which are derived directly from combustion sources including road traffic, power generation and industrial processes.
2. Secondary particles- which are formed by chemical reaction in the atmosphere
3. Coarse particles – comprise of emissions from a wide range of sources including re-suspended dusts from road traffic, construction works, and wind blown dusts and soils, and sea salt.

The conclusion from the previous round of review and assessment continues to be valid that it is not necessary to proceed to a detailed assessment for PM<sup>10</sup>. The results from the automatic monitoring station located in William Street, Newtownards indicates that there were no exceedences of the objective for this pollutant, however the data capture rate for 2009 was 79.5% which is below the 90% required by the technical guidance. The periods of data loss have been identified as follows:

- Data rejected from 1<sup>st</sup> January to 25<sup>th</sup> February due to a leak found at the base of the TEOM sensor unit.
- Data missing from 16<sup>th</sup> to 19<sup>th</sup> November, unable to contact the site and therefore assumed the power had tripped out.

Produced by AEA on behalf of Ards Borough Council

## ARDS LEISURE CENTRE 01 January to 31 December 2009

These data have been fully ratified by AEA

| POLLUTANT                            | PM <sub>10</sub> <sup>+</sup> | PM <sub>10</sub> VCM | PM <sub>10</sub> GR10 | SO <sub>2</sub>      |
|--------------------------------------|-------------------------------|----------------------|-----------------------|----------------------|
| Number Very High                     | -                             | -                    | 0                     | 0                    |
| Number High                          | -                             | -                    | 0                     | 0                    |
| Number Moderate                      | -                             | -                    | 0                     | 0                    |
| Number Low                           | -                             | -                    | 6968                  | 30835                |
| Maximum 15-minute mean               | 278 µgm <sup>-3</sup>         | -                    | 361 µgm <sup>-3</sup> | 72 µgm <sup>-3</sup> |
| Maximum hourly mean                  | 92 µgm <sup>-3</sup>          | -                    | 120 µgm <sup>-3</sup> | 61 µgm <sup>-3</sup> |
| Maximum running 8-hour mean          | 43 µgm <sup>-3</sup>          | -                    | 56 µgm <sup>-3</sup>  | 35 µgm <sup>-3</sup> |
| Maximum running 24-hour mean         | 34 µgm <sup>-3</sup>          | -                    | 45 µgm <sup>-3</sup>  | 16 µgm <sup>-3</sup> |
| Maximum daily mean                   | 29 µgm <sup>-3</sup>          | 63 µgm <sup>-3</sup> | 38 µgm <sup>-3</sup>  | 16 µgm <sup>-3</sup> |
| 99.9th percentile of 15-minute means | -                             | -                    | -                     | 32 µgm <sup>-3</sup> |
| 99.7th percentile of hourly means    | -                             | -                    | -                     | 21 µgm <sup>-3</sup> |
| 90th percentile of daily means       | 19 µgm <sup>-3</sup>          | 26 µgm <sup>-3</sup> | 25 µgm <sup>-3</sup>  | -                    |
| 99.2nd percentile of daily means     | -                             | -                    | -                     | 10 µgm <sup>-3</sup> |
| Average                              | 14 µgm <sup>-3</sup>          | 18 µgm <sup>-3</sup> | 18 µgm <sup>-3</sup>  | 2 µgm <sup>-3</sup>  |
| Data capture                         | 79.5 %                        | 52.9 %               | 79.5 %                | 89.9 %               |

+ PM<sub>10</sub> as measured by a TEOM

\*PM<sub>10</sub> VCM – TEOM data corrected using Volatile Correction Model

PM<sub>10</sub> GR10 - indicative gravimetric corrected, i.e. 'raw' TEOM PM<sub>10</sub> data with a 1.3 factor applied

All mass units are at 20°C and 1013mb

| Pollutant  | Air Quality Regulations<br>(Northern Ireland) 2003 | Exceedences | Days |
|--|--|-------------|------|
| PM <sub>10</sub> Particulate Matter<br>(VCM Corrected) | Daily mean > 50 µgm <sup>-3</sup>                  | 2           | 2    |
| PM <sub>10</sub> Particulate Matter<br>(VCM Corrected) | Annual mean > 40 µgm <sup>-3</sup>                 | 0           | -    |
| Sulphur Dioxide  | 15-minute mean > 266 µgm <sup>-3</sup>             | 0           | 0    |
| Sulphur Dioxide  | Hourly mean > 350 µgm <sup>-3</sup>                | 0           | 0    |
| Sulphur Dioxide  | Daily mean > 125 µgm <sup>-3</sup>                 | 0           | 0    |
| Sulphur Dioxide  | Annual mean > 20 µgm <sup>-3</sup>                 | 0           | -    |

The PM<sub>10</sub> TEOM data has been corrected using the Volatile Correction Model ([www.volatile-correction-model.info](http://www.volatile-correction-model.info)) as detailed on Page 3-10 of LAQM.TG (09).


Please be advised the VCM has been calculated using the sites identified from the model which contains some provisional data

For information – PM<sub>10</sub> TEOM data as indicative corrected, i.e. 'raw' TEOM PM<sub>10</sub> data with a 1.3 factor applied

| Pollutant  | Air Quality Regulations<br>(Northern Ireland) 2003 | Exceedences | Days |
|--|--|-------------|------|
| PM <sub>10</sub> Particulate Matter<br>(Gravimetric) | Daily mean > 50 µgm <sup>-3</sup>                  | 0           | 0    |
| PM <sub>10</sub> Particulate Matter<br>(Gravimetric) | Annual mean > 40 µgm <sup>-3</sup>                 | 0           | -    |

Produced by AEA on behalf of Ards Borough Council

**Ards Leisure Centre  
Hourly Mean Data for 01 January to 31 December 2009**

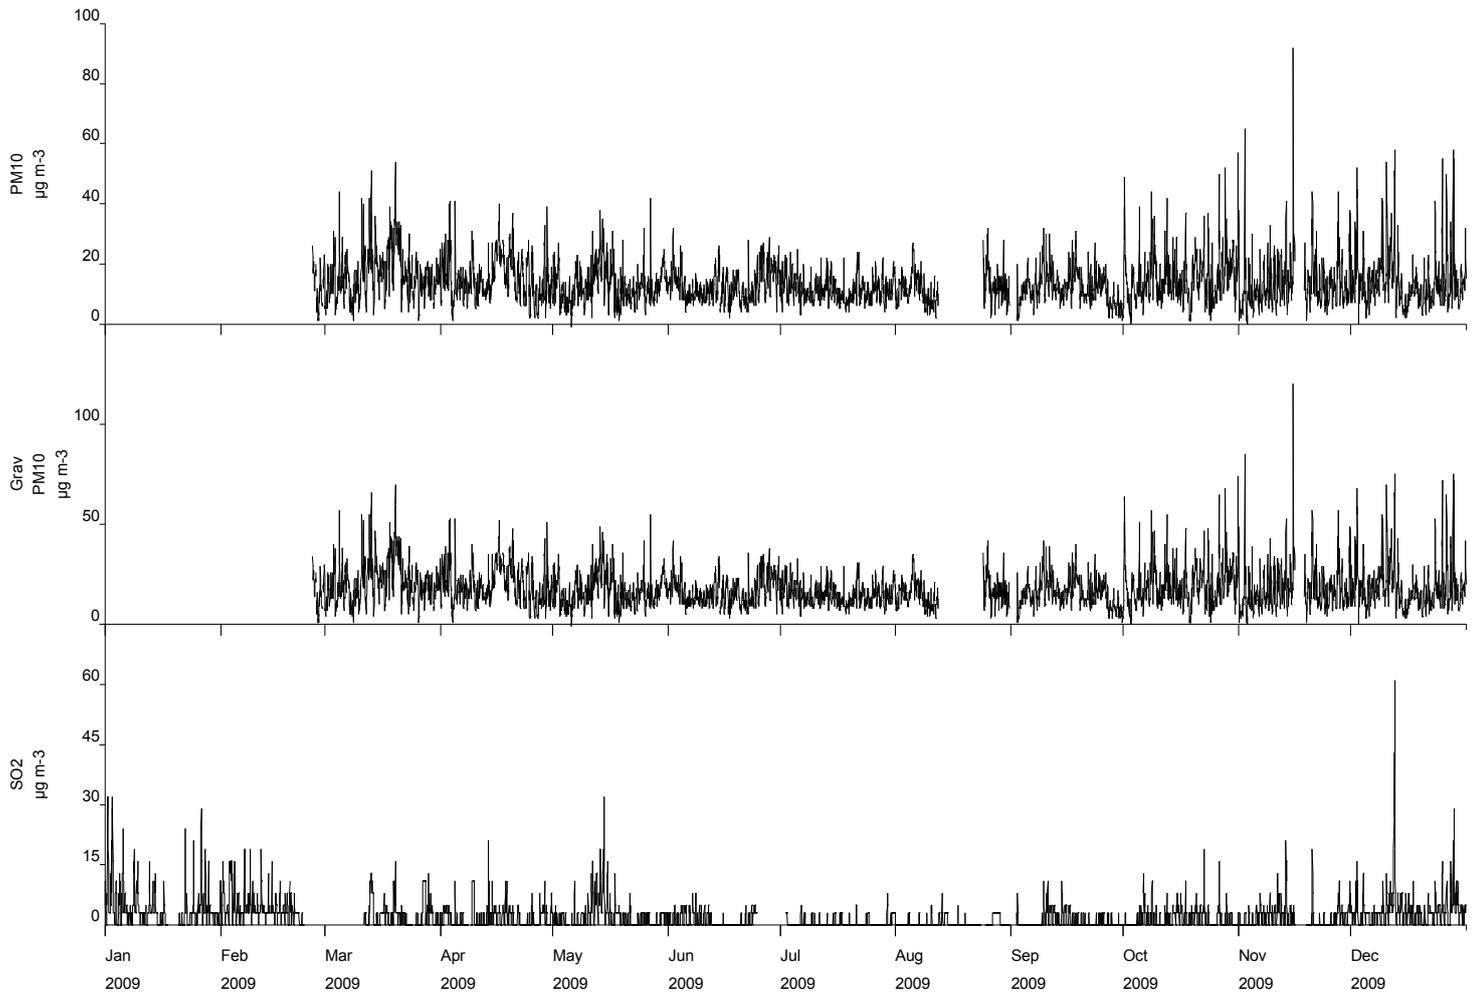

**Table 2.5a Results of PM<sub>10</sub> Automatic Monitoring: Comparison with Annual Mean Objective**

| Site ID | Location            | Within AQMA? | Data Capture 2009 % | Annual mean concentrations (µg/m <sup>3</sup> ) |      |      |
|---------|---------------------|--------------|---------------------|---|------|------|
|         |                     |              |                     | 2007  | 2008 | 2009 |
| 1       | Ards Leisure Centre | N            | 79.5                | 15  | 20   | 18   |

**Table 2.5b Results of PM<sub>10</sub> Automatic Monitoring: Comparison with 24-hour Mean Objective**

| Site ID | Location            | Within AQMA? | Data Capture 2009 % | Number of Exceedences of hourly mean (50 µg/m <sup>3</sup> )<br><i>If data capture &lt; 90%, include the 90<sup>th</sup> %ile of hourly means in brackets.</i> |      |        |
|---------|---------------------|--------------|---------------------|--|------|--------|
|         |                     |              |                     | 2007   | 2008 | 2009   |
| 1       | Ards Leisure Centre | N            | 79.5                | 3  | 0    | 2 (25) |

## **Sulphur Dioxide**

Sulphur dioxide is an acute respiratory irritant. It is generated during the combustion of fuels containing sulphur. The most significant source is fossil fuelled power stations, other major sources include industrial emissions and commercial & domestic heating.

There is currently no AQMA for sulphur dioxide. The automatic monitoring station located at Ards Leisure Centre, William Street Newtownards continually monitors sulphur dioxide using a UV Fluorescence analyser. The results from the automatic station indicate that during 2009 there was no exceedences with a data capture rate of 89.9%

The conclusion from the previous round of review and assessment continues to be valid that the objective for this pollutant would not be exceeded and it is therefore not necessary to proceed to a detailed assessment. After consultation with the air quality officer it was decided that the SO<sub>2</sub> analyser should be decommissioned. The analyser was decommissioned on 1<sup>st</sup> April 2010.

**Table 2.6 Results of SO<sub>2</sub> Automatic Monitoring: Comparison with Objectives**

Produced by AEA on behalf of Ards Borough Council

## ARDS LEISURE CENTRE 01 January to 31 December 2009

These data have been fully ratified by AEA

| POLLUTANT                            | PM <sub>10</sub> <sup>+</sup> | PM <sub>10</sub> VCM | PM <sub>10</sub> GR10 | SO <sub>2</sub>      |
|--------------------------------------|-------------------------------|----------------------|-----------------------|----------------------|
| Number Very High                     | -                             | -                    | 0                     | 0                    |
| Number High                          | -                             | -                    | 0                     | 0                    |
| Number Moderate                      | -                             | -                    | 0                     | 0                    |
| Number Low                           | -                             | -                    | 6968                  | 30835                |
| Maximum 15-minute mean               | 278 µgm <sup>-3</sup>         | -                    | 361 µgm <sup>-3</sup> | 72 µgm <sup>-3</sup> |
| Maximum hourly mean                  | 92 µgm <sup>-3</sup>          | -                    | 120 µgm <sup>-3</sup> | 61 µgm <sup>-3</sup> |
| Maximum running 8-hour mean          | 43 µgm <sup>-3</sup>          | -                    | 56 µgm <sup>-3</sup>  | 35 µgm <sup>-3</sup> |
| Maximum running 24-hour mean         | 34 µgm <sup>-3</sup>          | -                    | 45 µgm <sup>-3</sup>  | 16 µgm <sup>-3</sup> |
| Maximum daily mean                   | 29 µgm <sup>-3</sup>          | 63 µgm <sup>-3</sup> | 38 µgm <sup>-3</sup>  | 16 µgm <sup>-3</sup> |
| 99.9th percentile of 15-minute means | -                             | -                    | -                     | 32 µgm <sup>-3</sup> |
| 99.7th percentile of hourly means    | -                             | -                    | -                     | 21 µgm <sup>-3</sup> |
| 90th percentile of daily means       | 19 µgm <sup>-3</sup>          | 26 µgm <sup>-3</sup> | 25 µgm <sup>-3</sup>  | -                    |
| 99.2nd percentile of daily means     | -                             | -                    | -                     | 10 µgm <sup>-3</sup> |
| Average                              | 14 µgm <sup>-3</sup>          | 18 µgm <sup>-3</sup> | 18 µgm <sup>-3</sup>  | 2 µgm <sup>-3</sup>  |
| Data capture                         | 79.5 %                        | 52.9 %               | 79.5 %                | 89.9 %               |

+ PM<sub>10</sub> as measured by a TEOM\*PM<sub>10</sub> VCM – TEOM data corrected using Volatile Correction ModelPM<sub>10</sub> GR10 - indicative gravimetric corrected, i.e. 'raw' TEOM PM<sub>10</sub> data with a 1.3 factor applied

All mass units are at 20°C and 1013mb

| Pollutant  | Air Quality Regulations<br>(Northern Ireland) 2003 | Exceedences | Days |
|--|--|-------------|------|
| PM <sub>10</sub> Particulate Matter<br>(VCM Corrected) | Daily mean > 50 µgm <sup>-3</sup>                  | 2           | 2    |
| PM <sub>10</sub> Particulate Matter<br>(VCM Corrected) | Annual mean > 40 µgm <sup>-3</sup>                 | 0           | -    |
| Sulphur Dioxide  | 15-minute mean > 266 µgm <sup>-3</sup>             | 0           | 0    |
| Sulphur Dioxide  | Hourly mean > 350 µgm <sup>-3</sup>                | 0           | 0    |
| Sulphur Dioxide  | Daily mean > 125 µgm <sup>-3</sup>                 | 0           | 0    |
| Sulphur Dioxide  | Annual mean > 20 µgm <sup>-3</sup>                 | 0           | -    |

The PM<sub>10</sub> TEOM data has been corrected using the Volatile Correction Model ([www.volatile-correction-model.info](http://www.volatile-correction-model.info)) as detailed on Page 3-10 of LAQM.TG (09).

Please be advised the VCM has been calculated using the sites identified from the model which contains some provisional data


For information – PM<sub>10</sub> TEOM data as indicative corrected, i.e. 'raw' TEOM PM<sub>10</sub> data with a 1.3 factor applied

| Pollutant  | Air Quality Regulations<br>(Northern Ireland) 2003 | Exceedences | Days |
|--|--|-------------|------|
| PM <sub>10</sub> Particulate Matter<br>(Gravimetric) | Daily mean > 50 µgm <sup>-3</sup>                  | 0           | 0    |
| PM <sub>10</sub> Particulate Matter<br>(Gravimetric) | Annual mean > 40 µgm <sup>-3</sup>                 | 0           | -    |



Produced by AEA on behalf of Ards Borough Council

**Ards Leisure Centre  
Hourly Mean Data for 01 January to 31 December 2009**

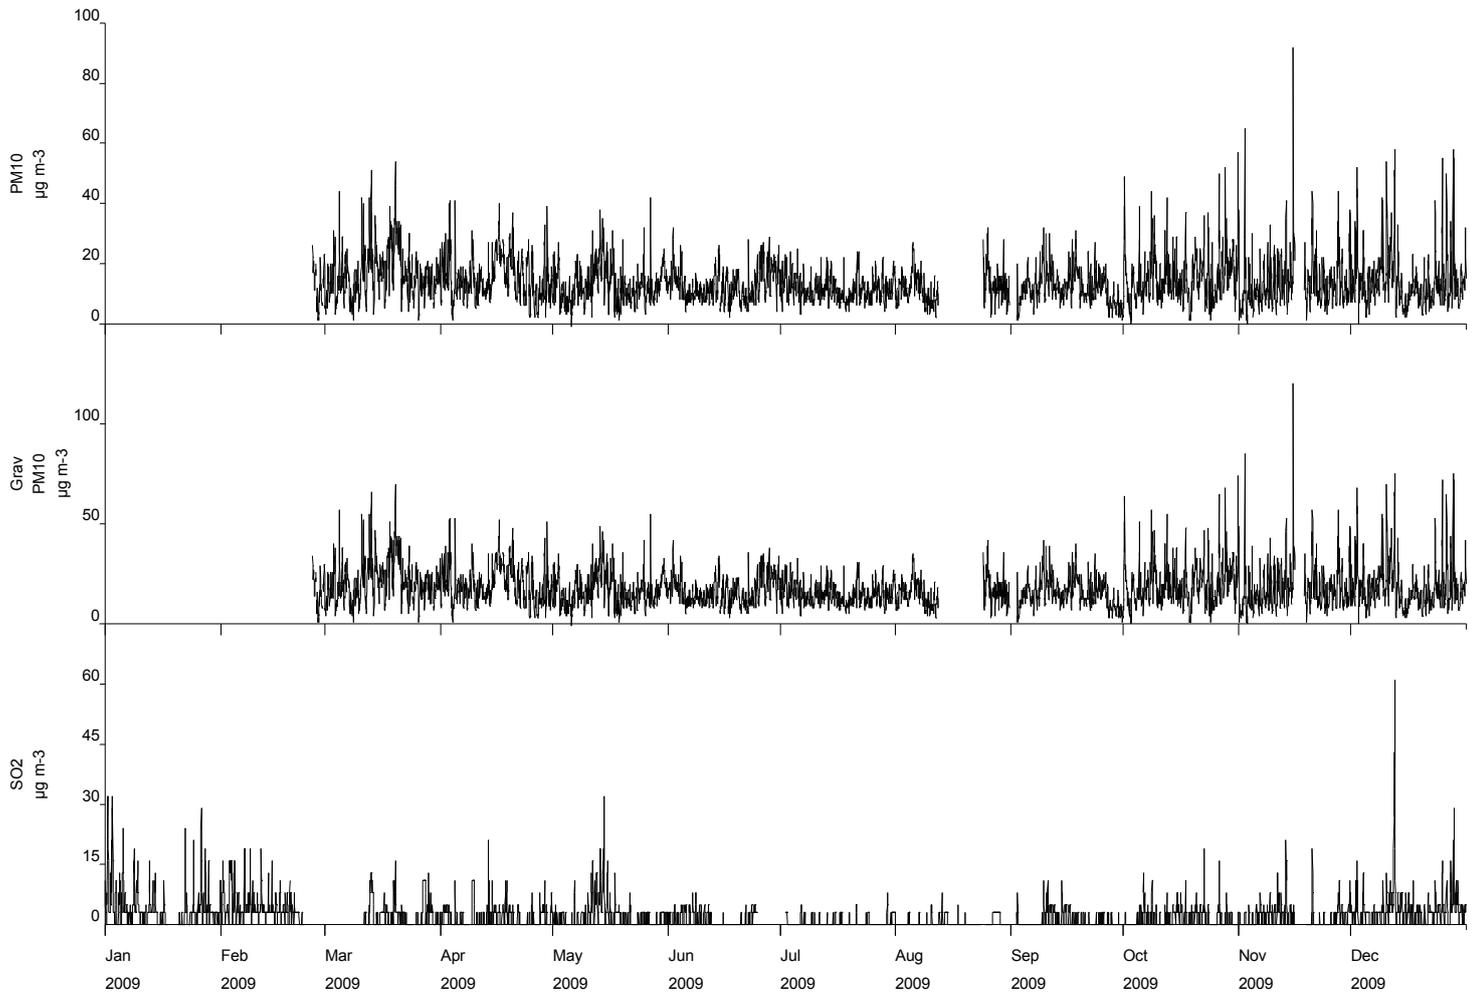

### **Summary of Compliance with AQS Objectives**

Ards Borough Council has examined the results from monitoring in the area. Concentrations are all below the objectives, therefore there is no need to proceed to a Detailed Assessment.

Delete box if not applicable. Otherwise add local authority name, amend the text as appropriate and leave box in the report.

### 3 New Local Developments

Ards Borough Council confirms that there are no new or newly identified local developments which may have an impact on air quality within the Local Authority area.

Delete box if not applicable. Otherwise add local authority name and leave in.

#### Road Traffic Sources

The following road has been constructed since the last review and assessment:

A20 Newtownards Southern Relief Road was completed early 2009, this involved the construction of a 2.0KM new link road, from the A20 Blaire Main Road South to the A21 Comber to the Portaferry Road in connection with the Castlebawn development.

An environmental impact assessment was carried out at the planning stage which adequately considered the effect on local air quality and showed no potential impact on the air quality objectives.

#### Industrial Sources

Ards Borough Council confirms that there are no new or proposed industrial installations for which planning approval has been granted within its area.

#### Commercial and Domestic Sources

Ards Borough Council confirms that there are no new commercial or domestic sources within the Borough.

#### New Developments with Fugitive or Uncontrolled Sources

Ards Borough Council confirms that there are no new potential sources of fugitive particulate matter emissions in the District.



## 4 Conclusions and Proposed Actions

### 4.1 Conclusions from New Monitoring Data

The 2009 monitoring data has been assessed and has indicated no exceedences of the national air quality objectives. It is therefore not necessary to proceed to a detailed assessment for any of the pollutants, however monitoring should continue at key locations to allow for comparison in future rounds of review and assessment.

### 4.2 Proposed Actions

Ards Borough Council intends to:

1. Continue to monitor nitrogen dioxide in key locations.  
Carry out a site visit with the air quality officer to Court Street, in order to identify an area with relevant exposure.  
Investigate a suitable location in High Street, Comber with relevant exposure to locate a NO<sub>2</sub> diffusion tube.
2. Continue to monitor PM10 at Ards Leisure Centre to allow for comparison with the objectives in future rounds of review and assessment. (SO<sub>2</sub> analyser decommissioned 1<sup>st</sup> April 2010).
3. Produce a workplace travel plan for employees
4. Actively promote the governments car sharing scheme throughout the Borough
5. Submit a progress report April 2011



## References

- Part IV of the Environment Act 1995 Local Air Quality Management Technical Guidance LAQM.TG (09)
- The Northern Ireland Air Quality Website-[www.airquality.ni.gov.uk](http://www.airquality.ni.gov.uk)
- Air Pollution NI- AEA/DOE pollution report
- Ards Borough Council Updating and Screening Assessment 2009

# Appendices

## Appendix 1: QA:QC Data

### Diffusion Tube Bias Adjustment Factors

Information regarding casella's Bias Adjustment can be viewed at:

[www.uwe.ac.uk/aqm/review/R&Asupport/diffusiontube310310xls](http://www.uwe.ac.uk/aqm/review/R&Asupport/diffusiontube310310xls)

Information regarding the tube precision can be viewed at:

[www.uwe.ac.uk/aqm/review/R&Asupport/tubeprecision2009pdf](http://www.uwe.ac.uk/aqm/review/R&Asupport/tubeprecision2009pdf)

### PM Monitoring Adjustment

The reference method for PM<sub>10</sub> is the gravimetric technique, in which the ambient concentration of PM<sub>10</sub> is calculated from the mass collected on a filter. The TEOM has been found to underestimate relative to this reference method. As a result data obtained from the TEOM sampler has been multiplied by a factor of 1.3 to give the gravimetric equivalent.

### QA/QC of Automatic Monitoring

Environmental Monitoring Systems (EMS) the supplier of the automated analysers are currently contracted to undertake routine servicing and maintenance of the equipment. This aims to ensure a percentage of data capture due to reduced delays in the execution of repairs, in the event of equipment breakdown.

The Council has engaged the services of NETCEN to undertake independent 6 monthly calibration. NETCEN is also responsible for data management which involves downloading data directly from the site on a daily basis, and validating the data to provide reports at regular intervals. Any irregularities are notified immediately to the Council and officers can take measures to rectify any problems or notify EMS to carry out repairs if necessary. The Councils air quality officers undertake routine calibration and maintenance of the equipment following the QA/QC procedures set out by NETCEN. A data capture rate of 90% for ratified data is specified in the technical guidance and is the recommended as a target for automatic monitoring.

**QA/QC of diffusion tube monitoring****Quality Assurance and Quality Control**

The semi automatic eight port sampler in the Scrabo Estate was sited in accordance with NETCEN guidelines. The equipment is subject to routine in-house checks and is serviced and maintained at two year intervals, however is no independent calibration of the equipment.

All six of the Nitrogen Dioxide Tubes are sited in accordance with the NETCEN guidelines; however, there is no longer a national monitoring network. The NO<sub>2</sub> tubes are supplied by Gradko Analysed by Casella, (preparation method 20% TEA in water), which is a UKAS recognised laboratory for the provision and analysis of diffusion tubes. They participate in the Work Place Analysis Scheme for Proficiency (WASP) for NO<sub>2</sub>

### Appendix 2: Nitrogen Dioxide Results

| 2004   |                | Jan  | Feb  | Mar  | Apr  | May  | Jun  | Jul  | Aug  | Sep  | Oct  | Nov  | Dec  |
|--------|----------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Ards 1 | Ashgrove       | 10.4 | 10.8 | 10.8 | 5.2  | 3.7  | 4.8  | 6.7  | 5.1  | 6.3  | 10.7 | 16.0 | 16.0 |
| Ards 2 | Islandmore Ave | 10.3 | 7.6  | 4.6  | 4.5  | 4.9  | 3.7  | 4.8  | 4.1  | 4.1  | 9.7  | 17.0 | 16.0 |
| Ards 3 | D'Dee Road     | 22.5 | 23.8 | 19.1 | 15.5 | 18.7 | 14.6 | 2.6  | 10.8 | 12.2 | 0.0  | 36.0 | 31.0 |
| Ards 4 | Blair Maine    | 0.0  | 18.2 | 12.3 | 0.0  | 12.9 | 11.0 | 0.0  | 9.0  | 11.5 | 17.6 | 26.0 | 22.0 |
| Ards 5 | Court street   | 28.0 | 30.6 | 29.7 | 26.7 | 27.1 | 28.1 | 20.9 | 22.3 | 23.4 | 20.4 | 51.0 | 40.0 |
| Ards 6 | Town Hall      | 26.6 | 25.7 | 26.8 | 24.3 | 23.5 | 23.0 | 26.5 | 19.4 | 22.8 | 27.4 | 47.0 | 41.0 |
|        |                |      |      |      |      |      |      |      |      |      |      |      |      |
| 2005   |                | Jan  | Feb  | Mar  | Apr  | May  | Jun  | Jul  | Aug  | Sep  | Oct  | Nov  | Dec  |
| Ards 1 | Ashgrove       | 12.0 | 17.0 | 15.0 | 17.0 | 10.0 | 9.0  | 8.0  | 9.0  | 13.0 | 10.0 | 21.0 | 21.0 |
| Ards 2 | Islandmore Ave | 11.0 | 16.0 | 12.0 | 12.0 | 9.0  | 9.0  | 7.0  | 11.0 | 11.0 | 11.0 | 22.0 | 23.0 |
| Ards 3 | D'Dee Road     | 29.0 | 35.0 | 37.0 | 28.0 | 31.0 | 20.0 | 19.0 | 29.0 | 30.0 | 24.0 | 49.0 | 45.0 |
| Ards 4 | Blair Maine    | 20.0 | 26.0 | 28.0 | 25.0 | 20.0 | 23.0 | 14.0 | 19.0 | 23.0 | 17.0 | 32.0 | 33.0 |
| Ards 5 | Court street   | 40.0 | 50.0 | 56.0 | 39.0 | 48.0 | 38.0 | 36.0 | 32.0 | 43.0 | 33.0 | 69.0 | 62.0 |
| Ards 6 | Town Hall      | 32.0 | 39.0 | 45.0 | 45.0 | 40.0 | 38.0 | 30.0 | 37.0 | 43.0 | 40.0 | 56.0 | 53.0 |
|        |                |      |      |      |      |      |      |      |      |      |      |      |      |
| 2006   |                | Jan  | Feb  | Mar  | Apr  | May  | Jun  | Jul  | Aug  | Sep  | Oct  | Nov  | Dec  |
| Ards 1 | Ashgrove       | 24.0 | 19.0 | 13.0 | 13.0 | 0.0  | 9.0  | 5.0  | 8.0  | 7.0  | 23.0 | 17.0 | 17.0 |
| Ards 2 | Islandmore Ave | 21.0 | 17.0 | 12.0 | 13.0 | 0.0  | 8.0  | 7.0  | 8.0  | 5.0  | 13.0 | 14.0 | 16.0 |
| Ards 3 | D'Dee Road     | 41.0 | 35.0 | 33.0 | 34.0 | 0.0  | 25.0 | 17.0 | 14.0 | 20.0 | 22.0 | 27.0 | 34.0 |
| Ards 4 | Blair Maine    | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  |
| Ards 4 | Talbot street  | 0.0  | 0.0  | 24.0 | 27.0 | 0.0  | 23.0 | 12.0 | 29.0 | 0.0  | 24.0 | 24.0 | 20.0 |
| Ards 5 | Court street   | 56.0 | 64.0 | 44.0 | 50.0 | 0.0  | 37.0 | 0.0  | 32.0 | 22.0 | 43.0 | 24.0 | 38.0 |
| Ards 6 | Town Hall      | 65.0 | 43.0 | 45.0 | 52.0 | 0.0  | 42.0 | 40.0 | 38.0 | 46.0 | 55.0 | 73.0 | 47.0 |
|        |                |      |      |      |      |      |      |      |      |      |      |      |      |
| 2007   |                | Jan  | Feb  | Mar  | Apr  | May  | Jun  | Jul  | Aug  | Sep  | Oct  | Nov  | Dec  |
| Ards 1 | Ashgrove       | 20.0 | 20.0 | 15.0 | 9.0  | 7.0  | 10.0 | 7.0  | 9.0  | 13.0 | 14.0 | 16.0 | 21.0 |
| Ards 2 | Islandmore Ave | 18.0 | 20.0 | 13.0 | 7.0  | 8.0  | 6.0  | 10.0 | 6.0  | 12.0 | 31.0 | 19.0 | 15.0 |
| Ards 3 | D'Dee Road     | 39.0 | 38.0 | 39.0 | 19.0 | 1.0  | 21.0 | 23.0 | 33.0 | 37.0 | 31.0 | 42.0 | 36.0 |
| Ards 4 | Blair Maine    | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0    | 0.0  | 0.0  | 0.0  |
| Ards 4 | Talbot street  | 29.0 | 32.0 | 36.0 | 16.0 | 21.0 | 15.0 | 18.0 | 24.0 | 33.0 | 44.0 | 46.0 | 22.0 |
| Ards 5 | Court street   | 52.0 | 46.0 | 60.0 | 30.0 | 43.0 | 47.0 | 51.0 | 31.0 | 25.0 | 36.0 | 68.0 | 21.0 |
| Ards 6 | Town Hall      | 49.0 | 61.0 | 43.0 | 34.0 | 43.0 | 13.0 | 36.0 | 61.0 | 51.0 | 44.0 | 83.0 | 56.0 |
|        |                |      |      |      |      |      |      |      |      |      |      |      |      |

| 2008   |                | Jan  | Feb  | Mar  | Apr  | May  | Jun  | Jul  | Aug  | Sep  | Oct  | Nov  | Dec  |
|--------|----------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Ards 1 | Ashgrove       | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  |
| Ards 2 | Islandmore Ave | 19.0 | 24.0 | 12.0 | 10.0 | 9.0  | 8.0  | 0.0  | 9.0  | 10.0 | 16.0 | 15.0 | 27.0 |
| Ards 3 | D'Dee Road     | 48.0 | 40.0 | 25.0 | 25.0 | 29.0 | 0.0  | 30.0 | 30.0 | 30.0 | 33.0 | 38.0 | 52.0 |
| Ards 4 | Blair Maine    | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  |
| Ards 4 | Talbot street  | 64.0 | 29.0 | 27.0 | 21.0 | 28.0 | 21.0 | 23.0 | 19.0 | 29.0 | 29.0 | 35.0 | 47.0 |
| Ards 5 | Court street   | 64.0 | 76.0 | 48.0 | 39.0 | 64.0 | 56.0 | 42.0 | 45.0 | 44.0 | 49.0 | 60.0 | 74.0 |
| Ards 6 | Town Hall      | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  |
| Ards 7 | 2A East Street | 0.0  | 0.0  | 19.0 | 17.0 | 18.0 | 17.0 | 16.0 | 20.0 | 19.0 | 32.0 | 33.0 | 39.0 |
| Ards 8 | Church Street  | 0.0  | 0.0  | 34.0 | 25.0 | 24.0 | 28.0 | 26.0 | 30.0 | 34.0 | 36.0 | 37.0 | 56.0 |
| 2009   |                | Jan  | Feb  | Mar  | Apr  | May  | Jun  | Jul  | Aug  | Sep  | Oct  | Nov  | Dec  |
| Ards   | Ashgrove       | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  |
| Ards 4 | Islandmore Ave | 21.0 | 24.0 | 17.0 | 13.0 | 9.0  | 9.0  | 7.0  | 0.0  | 18.0 | 15.0 | 15.0 | 20.0 |
| Ards 3 | D'Dee Road     | 32.0 | 53.0 | 42.0 | 45.0 | 31.0 | 33.0 | 39.0 | 32.0 | 44.0 | 37.0 | 33.0 | 46.0 |
| Ards   | Blair Maine    | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  |
| Ards 6 | Talbot street  | 30.0 | 48.0 | 33.0 | 30.0 | 21.0 | 23.0 | 18.0 | 20.0 | 42.0 | 26.0 | 27.0 | 35.0 |
| Ards 2 | Court street   | 50.0 | 79.0 | 62.0 | 52.0 | 52.0 | 57.0 | 42.0 | 28.0 | 54.0 | 38.0 | 35.0 | 53.0 |
| Ards   | Town Hall      | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  |
| Ards 1 | 2A East Street | 31.0 | 38.0 | 29.0 | 25.0 | 23.0 | 19.0 | 15.0 | 20.0 | 29.0 | 25.0 | 24.0 | 34.0 |
| Ards 5 | Church Street  | 40.0 | 53.0 | 41.0 | 37.0 | 37.0 | 27.0 | 29.0 | 32.0 | 38.0 | 35.0 | 36.0 | 42.0 |

