

Air Quality Review and Assessment - Stage 2

A report produced for Carrickfergus Borough Council

February 2002

Air Quality Review and Assessment - Stage 2

February 2002

Title	Air Quality Review and Assessment - Stage 2
Customer	Carrickfergus Borough Council
Customer reference	ED20615172
Confidentiality, copyright and reproduction	Copyright AEA Technology plc All rights reserved. Enquiries about copyright and reproduction should be addressed to the Commercial Manager, AEA Technology plc.
File reference	J/EQ/Stage3_R&A/Ireland
Report number	AEAT/ENV/R/1012
Report status	Issue 1
ISBN number	

National Environmental Technology Centre
 Culham
 Abingdon
 Oxfordshire
 OX14 3ED
 Telephone 01235 46 3554
 Facsimile 01235 46 3005

AEA Technology is the trading name of AEA Technology plc
 AEA Technology is certified to BS EN ISO9001:(1994)

	Name	Signature	Date
Author	Kate Haigh		
Reviewed by	Beth Conlan		
Approved by	Beth Conlan		

Executive Summary

The UK Government published its strategic policy framework for air quality management in 1995 establishing national strategies and policies on air quality which culminated in the Environment Act, 1995 in Great Britain. The National Air Quality Strategy provides a framework for air quality control through air quality management and air quality standards. New national air quality standards have been proposed by the Expert Panel on Air Quality Standards (EPAQS) for the UK. These and other air quality standards and their objectives have been enacted through the Air Quality Regulations in England Wales and Scotland (2000). The GB Environment Act 1995 requires Local Authorities to undertake an air quality review. In areas where air quality objectives are not anticipated to be met by the specified date, Local Authorities are required to establish Air Quality Management Areas to improve air quality. While not required by the Act, many boroughs in Northern Ireland have chosen to follow the framework.

In Northern Ireland there are at present no equivalent Air Quality Regulations. However, there is a duty to meet the Air Quality limit values set within the European Commission Air Quality Framework Directive on which the UK national air quality objectives are based. Consequently, Councils in Northern Ireland have proceeded with the review and assessment process of air quality on a non-statutory basis.

The first step in this process is to undertake a review of current and potential future air quality in a three staged approach. Carrickfergus Borough Council have completed a Stage 1 review and assessment which concluded that a Stage 2 review and assessment was required for the pollutants nitrogen dioxide, sulphur dioxide and particulate matter.

This report is equivalent to a stage two air quality review as outlined in the Government's published guidance. The air quality review investigates current and potential future air quality through an examination of the location and size of principal emission sources, emissions modelling exercises and by reference to monitored air quality data.

The conclusions of the report are as follows:

The air quality objectives for the following pollutants are likely to be met and a third stage review is not required of emissions from vehicular and industrial sources:

- Nitrogen Dioxide
- PM₁₀
- Sulphur Dioxide

Contents

1	Introduction to the air quality review	1
1.1	PURPOSE OF THE STUDY	1
1.2	APPROACH TAKEN	1
1.3	STRUCTURE OF THIS REPORT	2
1.4	INFORMATION PROVIDED BY CARRICKFERGUS BOROUGH COUNCIL TO SUPPORT THIS ASSESSMENT	2
1.4.1	Carrickfergus Borough and its environs	2
1.4.2	Local air quality monitoring data	2
1.4.3	Traffic data	3
1.4.4	Part A and B process and >5 MW (thermal) combustion plants	3
1.4.5	Effect of coal burning in the region	Error! Bookmark not defined.
2	Review and assessment of nitrogen dioxide	Error! Bookmark not defined.
2.1	INTRODUCTION	4
2.1.1	Standards and objectives for nitrogen dioxide	4
2.1.2	The National Perspective	4
2.2	BACKGROUND CONCENTRATIONS OF NITROGEN DIOXIDE	5
2.3	MONITORING OF NITROGEN DIOXIDE	6
2.3.1	Diffusion tube data	6
2.4	IMPACT OF ROAD TRAFFIC ON CONCENTRATIONS OF OXIDES OF NITROGEN	6
2.5	IMPACT OF INDUSTRY ON CONCENTRATIONS OF NITROGEN OXIDES	7
2.6	CONCLUSIONS FOR NITROGEN DIOXIDE CONCENTRATIONS IN THE CARRICKFERGUS BOROUGH COUNCIL AREA	8
3	Review and assessment of PM₁₀	9
3.1	INTRODUCTION	9
3.1.1	Standards and objectives for particulate matter	9
3.1.2	The National Perspective	9
3.2	BACKGROUND CONCENTRATIONS OF PM ₁₀	10
3.3	IMPACT OF ROAD TRAFFIC ON PM ₁₀	10
3.3.1	Prediction for 2004	10
3.4	IMPACT OF DOMESTIC COMBUSTION ON CONCENTRATIONS OF PM ₁₀	ERROR! BOOK
3.5	CONCLUSIONS FOR PM ₁₀ CONCENTRATIONS IN THE CARRICKFERGUS BOROUGH COUNCIL AREA	11
4	Review and assessment of sulphur dioxide	12
4.1	INTRODUCTION	12
4.1.1	Standards and objectives for sulphur dioxide	12
4.1.2	The National Perspective	12

4.2	BACKGROUND CONCENTRATIONS OF SULPHUR DIOXIDE	13
4.3	MONITORING OF SULPHUR DIOXIDE	13
4.4	IMPACT OF INDUSTRY ON CONCENTRATIONS OF SULPHUR DIOXIDE	14
4.5	DOMESTIC SOLID FUEL USE	ERROR! BOOKMARK NOT DEFINED.
4.6	CONCLUSIONS FOR SULPHUR DIOXIDE CONCENTRATIONS IN THE CARRICKFERGUS BOROUGH COUNCIL AREA	14
5	Conclusions and recommendations for each pollutant	15
5.1	NITROGEN DIOXIDE	15
5.2	PARTICULATE MATTER (PM ₁₀)	15
5.3	SULPHUR DIOXIDE	15
6	References	16

Appendices

APPENDIX 1	Diffusion tube monitoring data
APPENDIX 2	Detailed traffic flow data

Acronyms and definitions

AQS	Air Quality Strategy
AADTF	annual average daily traffic flow
APEG	Airborne Particles Expert Group
AQMA	Air Quality Management Area
AUN	Automatic Urban Network
CHP	Combined Heat and Power plant
CNS	central nervous system
CO	Carbon monoxide
CRI	Chemical Release Inventory (now the Pollution Inventory)
DEFRA	Department of the Environment, Food and Rural Affairs.
DMRB	Design Manual for Roads and Bridges
EA	Environment Agency
EPA	Environmental Protection Act
EPAQS	Expert Panel on Air Quality Standards
HA	Highways Agency
HFO	heavy fuel oil
HGV	heavy goods vehicle
IPPC	Integrated Pollution Prevention and Control
M	mega (1×10^6)
MoD	Ministry of Defence
NAEI	National Atmospheric Emission Inventory
NETCEN	National Environmental Technology Centre
NO ₂	Nitrogen dioxide
NO _x	Oxides of nitrogen
PG	Process Guidance (notes)
PI	pollution inventory
ppb	parts per billion
ppm	parts per million
PSG	Pollutant Specific Guidance (see Reference section)
SO ₂	Sulphur dioxide
SoS	Secretary of State
SSAQR	Second Stage Air Quality Review
TEOM	tapered element oscillating microbalance
VOC	volatile organic compound

1 Introduction to the air quality review

The UK Government published its strategic policy framework for air quality management in 1995 establishing national strategies and policies on air quality, which culminated in the Environment Act, 1995 in Great Britain. The National Air Quality Strategy provides a framework for air quality control through air quality management and air quality standards. New national air quality standards have been proposed by the Expert Panel on Air Quality Standards (EPAQS) for the UK. These and other air quality standards and their objectives have been enacted through the Air Quality Regulations in England, Wales and Scotland (2000). The GB Environment Act 1995 requires Local Authorities to undertake an air quality review. In areas where air quality objectives are not anticipated to be met by the specified date, Local Authorities are required to establish Air Quality Management Areas to improve air quality.

In Northern Ireland there are at present no equivalent Air Quality Regulations. However, there is a duty to meet the Air Quality limit values set within the European Commission Air Quality Framework Directive on which the UK national air quality objectives are based. Consequently, Councils in Northern Ireland have proceeded with the review and assessment process of air quality on a non-statutory basis.

1.1 PURPOSE OF THE STUDY

NETCEN was commissioned by Carrickfergus Borough Council to complete a Second Stage Air Quality Review (SSAQR) within their area for vehicular and industrial sources of pollution. The review:

- Investigates present and potential future air quality in the Carrickfergus Borough Council area
- Identifies any actions that are likely to be required by Carrickfergus Borough Council under Part IV of the GB Environment Act, 1995, if it applied to Northern Ireland.
- Recommends actions, if necessary, to control the subsequent air quality within the Carrickfergus Borough Council area.

1.2 APPROACH TAKEN

The approach taken in this study was to:

1. Identify the principal sources of pollutant emissions affecting air quality in the Carrickfergus Borough Council area.
2. Model expected present and potential future levels of pollutant concentrations in the Carrickfergus Borough Council area and identify the areas of the district which are likely to experience the highest concentrations of pollutants.
3. Indicate whether present and predicted future air quality in the Borough is likely to comply with the requirements of the Air Quality Strategy.
4. Identify areas for further investigation.

In preparing this report the latest version of the Government Pollutant Specific Guidance has been used LAQM TG4(00).

1.3 STRUCTURE OF THIS REPORT

This report is structured in the following way:

Chapter 1 introduces the UK Air Quality Strategy (AQS) and the local data used in this review and assessment. Chapter 2 provides more details on the local air quality management process. Chapters 3 to 5 consider the pollutants specified in the AQS and give an overview including the AQS objectives, the national perspective and the input required for this review. Data from national concentration maps, monitoring studies, road traffic, and local and distant point sources are then considered. Each chapter closes with an indication of whether the relevant AQS objective is expected to be met, or whether further work is required. Chapter 6 summarises all the findings and recommendations of the work.

1.4 INFORMATION PROVIDED BY CARRICKFERGUS BOROUGH COUNCIL TO SUPPORT THIS ASSESSMENT

The following information from Carrickfergus Borough Council was used to complete this review and assessment.

- Local air quality monitoring data
- Proposed developments
- Part A and B processes under the Environmental Protection Act (EPA)
- Traffic flow and speed data
- Transport strategy
- Large combustion sources

1.4.1 Carrickfergus Borough and its environs

Carrickfergus stretches along the northern shore of Belfast Lough from Greenisland to Whitehead. It's population 37,900 enjoys mild winters and warm summers. Most of the population reside within the coastal strip and further inland the ground rises to a height of 275 metres at Knockagh which is the southernmost reaches of the Antrim Plateau.

1.4.2 Industrial and transport developments in Carrickfergus Borough Council

Some developments may have an important impact on air quality in the future and are therefore considered in the Stage 2 Review and Assessment.

1.4.3 Local air quality monitoring data

1.4.3.1 Extent of data available

Carrickfergus Borough Council had been monitoring nitrogen dioxide at nine sites with passive diffusion tube samplers. Appendix 1 gives more information about the local air quality monitoring.

1.1.1.21.4.3.2 Quality Assurance/Quality control of data

The diffusion tubes were analysed by the Ruddock and Sherratt laboratory which participate in the laboratory intercomparison exercises for the UK National NO₂ Diffusion Tube Network. The results in this report have therefore been corrected for analyst bias as advised in the Government Pollutant Specific Guidance.

1.1.41.4.4 Traffic data

Appendix 2 summarises the traffic information used in the assessment.

1.1.1.11.4.4.1 Flow and speed

Carrickfergus Borough Council provided traffic flow measurements at a range of locations within Carrickfergus and in the surrounding area taken at varying times. Average traffic speeds and HGV percentages were also supplied.

1.4.4.2 Traffic Growth

The national air quality objectives are targets for 2004 or 2005. The traffic predictions for 2004/2005 have been used as supplied by Carrickfergus Borough Council.

1.1.1.31.4.4.3 Fraction of HGVs

The model requires estimates of the fraction of HGVs on the roads to predict the pollutant concentrations. These data were available from Carrickfergus Borough Council.

1.1.1.41.4.4.4 Distance of the receptor from the centre of the road and the kerbside

The model used to predict the roadside concentrations requires estimates of the distance of the receptor and the kerbside from the centre of the road. This information was available from the council either directly or supplied on 1:1250 scale maps on which the required measurements were already marked or could be measured.

1.4.5 Part A and B process and >5 MW (thermal) combustion plants

Part A and B processes can contribute a range of pollutants to ambient air. Lists of Part A and B processes that needed further assessment in a Stage 2 were provided.

2 The updated Air Quality Strategy

The UK Government published its proposals for review of the National Air Quality Strategy in early 1999 (DETR, 1999). These proposals included revised objectives for many of the regulated pollutants. A key factor in the proposals to revise the objectives was the agreement in June 1998 at the European Union Environment Council of a Common Position on Air Quality Daughter Directives (AQDD).

Following consultation on the Review of the National Air Quality Strategy, the Government prepared the Air Quality Strategy for England, Scotland, Wales and Northern Ireland for consultation in August 1999. It was published in January 2000 (DETR, 2000).

Table 2.1 Major elements of the Environment Act 1995

Part IV Air Quality	Commentary
Section 80	Obliges the Secretary of State (SoS) to publish a National Air Quality Strategy as soon as possible.
Section 81	Obliges the Environment Agency to take account of the strategy.
Section 82	Requires local authorities, any unitary or district, to review air quality and to assess whether the air quality standards and objectives are being achieved. Areas where standards fall short must be identified.
Section 83	Requires a local authority, for any area where air quality standards are not being met, to issue an order designating it an air quality management area (AQMA).
Section 84	Imposes duties on a local authority with respect to AQMAs. The local authority must carry out further assessments and draw up an action plan specifying the measures to be carried out and the timescale to bring air quality in the area back within limits.
Section 85	Gives reserve powers to cause assessments to be made in any area and to give instructions to a local authority to take specified actions. Authorities have a duty to comply with these instructions.
Section 86	Provides for the role of County Councils to make recommendations to a district on the carrying out of an air quality assessment and the preparation of an action plan.
Section 87	Provides the SoS with wide ranging powers to make regulations concerning air quality. These include standards and objectives, the conferring of powers and duties, the prohibition and restriction of certain activities or vehicles, the obtaining of information, the levying of fines and penalties, the hearing of appeals and other criteria. The regulations must be approved by affirmative resolution of both Houses of Parliament.
Section 88	Provides powers to make guidance which local authorities must have regard to.

2.1 OVERVIEW OF THE PRINCIPLES AND MAIN ELEMENTS OF THE AIR QUALITY STRATEGY

The main elements of the AQS can be summarised as follows:

- The use of a health effects based approach using national air quality standards and objectives.
- The use of policies by which the objectives can be achieved and which include the input of important actors such as industry, transportation bodies and local authorities.
- The predetermination of timescales with a target dates of 2003, 2004 and 2005 for the achievement of objectives and a commitment to review the Strategy every three years.

It is intended that the NAQS will provide a framework for the improvement of air quality that is both clear and workable. In order to achieve this, the Strategy is based on several principles that include:

- the provision of a statement of the Government's general aims regarding air quality;
- clear and measurable targets;
- a balance between local and national action and
- a transparent and flexible framework.

Co-operation and participation by different economic and governmental sectors is also encouraged within the context of existing and potential future international policy commitments.

2.1.1 National Air Quality Standards

At the centre of the AQS is the use of national air quality standards to enable air quality to be measured and assessed. These also provide the means by which objectives and timescales for the achievement of objectives can be set. Most of the proposed standards have been based on the available information concerning the health effects resulting from different ambient concentrations of selected pollutants and are the consensus view of medical experts on the Expert Panel on Air Quality Standards (EPAQS). These standards and associated specific objectives to be achieved between 2003 and 2008 are shown in Table 2.2. The table shows the standards in ppb and $\mu\text{g m}^{-3}$ with the number of exceedences that are permitted (where applicable) and the equivalent percentile.

Specific objectives relate either to achieving the full standard or, where use has been made of a short averaging period, objectives are sometimes expressed in terms of percentile compliance. The use of percentiles means that a limited number of exceedences of the air quality standard over a particular timescale, usually a year, are permitted. This is to account for unusual meteorological conditions or particular events such as November 5th. For example, if an objective is to be complied with at the 99.9th percentile, then 99.9% of measurements at each location must be at or below the level specified.

Table 2.2 Air Quality Objectives in the Air Quality Regulations (2000) for the purpose of Local Air Quality Management

Pollutant	Concentration limits		Averaging period	Objective	
	($\mu\text{g m}^{-3}$)	(ppb)		($\mu\text{g m}^{-3}$)	[number of permitted exceedences a year and equivalent percentile] date for objective
Benzene	16.25	5	running annual mean	16.25	by 31.12.2003
1,3-butadiene	2.25	1	running annual mean	2.25	by 31.12.2003
CO	11,600	10,000	running 8-hour mean	11,600	by 31.12.2003
Pb	0.5	-	annual mean	0.5	by 31.12. 2004
	0.25	-	annual mean	0.25	by 31.12. 2008
NO₂ (see note)	200	105	1 hour mean	200	by 31.12.2005 [maximum of 18 exceedences a year or equivalent to the 99.8 th percentile]
	40	21	annual mean	40	by 31.12.2005
PM₁₀ (gravimetric) (see note)	50	-	24-hour mean	50	by 31.12.2004 [maximum of 35 exceedences a year or ~ equivalent to the 90 th percentile]
	40	-	annual mean	40	by 31.12.2004
SO₂	266	100	15 minute mean	266	by 31.12.2005 [maximum of 35 exceedences a year or equivalent to the 99.9 th percentile]
	350	132	1 hour mean	350	by 31.12.2004 [maximum of 24 exceedences a year or equivalent to the 99.7 th percentile]
	125	47	24 hour mean	125	by 31.12.2004 [maximum of 3 exceedences a year or equivalent to the 99 th percentile]

Notes

1. Conversions of ppb and ppm to ($\mu\text{g m}^{-3}$) correct at 20°C and 1013 mb.
2. The objectives for nitrogen dioxide are provisional.
3. PM₁₀ measured using the European gravimetric transfer standard or equivalent. The Government and the devolved administrations see this new 24-hour mean objective for particles as a staging post rather than a final outcome. Work has been set in hand to assess the prospects of strengthening the new objective.

2.1.2 Policies in place to allow these objectives to be achieved

The policy framework to allow these objectives to be achieved is one that takes a local air quality management approach. This is superimposed upon existing national and international regulations in order to effectively tackle local air quality issues as well as issues relating to wider spatial scales. National and EC policies that already exist provide a good basis for progress towards the air quality objectives set for 2003 to 2008. For example, the Environmental Protection Act 1990 allows for the monitoring and control of emissions from industrial processes and various EC Directives have ensured that road transport emission and fuel standards are in place. These policies are being developed to include more stringent controls. Recent developments in the UK include the announcement by the Environment Agency in January 2000 on controls on emissions of SO₂ from coal and oil fired power stations. This system of controls means that by the end of 2005 coal and oil fired power stations will meet the air quality standards set out in the AQS.

Local air quality management provides a strategic role for local authorities in response to particular air quality problems experienced at a local level. This builds upon current air quality control responsibilities and places an emphasis on bringing together issues relating to transport, waste, energy and planning in an integrated way. This integrated approach involves a number of different aspects. It includes the development of an appropriate local framework that allows air quality issues to be considered alongside other issues relating to polluting activity. It should also enable co-operation with and participation by the general public in addition to other transport, industrial and governmental authorities.

An important part of the Strategy is the requirement for local authorities to carry out air quality reviews and assessments of their area against which current and future compliance with air quality standards can be measured. Over the longer term, these will also enable the effects of policies to be studied and therefore help in the development of future policy. The Government has prepared guidance to help local authorities to use the most appropriate tools and methods for conducting a review and assessment of air quality in their District. This is part of a package of guidance being prepared to assist with the practicalities of implementing the AQS. Other guidance covers air quality and land use planning, air quality and traffic management and the development of local air quality action plans and strategies.

2.1.3 Timescales to achieve the objectives

In most local authorities in the UK, objectives will be met for most of the pollutants within the timescale of the objectives shown in Table 2.2. It is important to note that the objectives for NO₂ remain provisional. The Government has recognised the problems associated with achieving the standard for ozone and this will not therefore be a statutory requirement. Ozone is a secondary pollutant and transboundary in nature and it is recognised that local authorities themselves can exert little influence on concentrations when they are the result of regional primary emission patterns.

2.2 AIR QUALITY REVIEWS

A range of Technical Guidance has been issued to enable air quality to be monitored, modelled, reviewed and assessed in an appropriate and consistent fashion. This includes the Technical Guidance Note LAQM.TG4(98), and the latest version LAQM.TG4(00) May 2000, on 'Review and Assessment: Pollutant Specific Guidance'. This review and assessment has considered the procedures set out in the latest consultation draft.

The primary objective of undertaking a review of air quality is to identify any areas that are unlikely to meet national air quality objectives and ensure that air quality is considered in local authority decision making processes. The complexity and detail required in a review depends on the risk of failing to achieve air quality objectives and it has been proposed therefore that reviews should be carried out in three stages. All three stages of review and assessment may be necessary and every authority is expected to undertake at least a first stage review and assessment of air quality in their authority area. The Stages are briefly described in the following table, Table 2.3.

Table 2.3 Brief details of Stages in the Air Quality Review and Assessment process

Stage	Objective	Approach	Outcome
First Stage Review and Assessment	<ul style="list-style-type: none"> Identify all significant pollutant sources within or outside of the authority’s area. 	<ul style="list-style-type: none"> Compile and collate a list of potentially significant pollution sources using the assessment criteria described in the Pollutant Specific Guidance 	
	<ul style="list-style-type: none"> Identify those pollutants where there is a risk of exceeding the air quality objectives, and for which further investigation is needed. 	<ul style="list-style-type: none"> Identify sources requiring further investigation. 	<ul style="list-style-type: none"> Decision about whether a Stage 2 Review and Assessment is needed for one or more pollutants. If not, no further review and assessment is necessary.
Second Stage Review and Assessment	<ul style="list-style-type: none"> Further screening of significant sources to determine whether there is a significant risk of the air quality objectives being exceeded. 	<ul style="list-style-type: none"> Use of screening models or monitoring methods to assess whether there is a risk of exceeding the air quality objectives. 	
	<ul style="list-style-type: none"> Identify those pollutants where there is a risk of exceeding the objectives, and for which further investigation is needed. 	<ul style="list-style-type: none"> The assessment need only consider those locations where the highest likely concentrations are expected, and where public exposure is relevant. 	<ul style="list-style-type: none"> Decision about whether a Stage 3 Review and Assessment is needed for one or more pollutants. If, as a result of estimations of ground level concentrations at suitable receptors, a local authority judges that there is no significant risk of not achieving an air quality objective, it can be confident that an Air Quality Management Area (AQMA) will not be required.
			<ul style="list-style-type: none"> However, if there is doubt that an air quality objective will be achieved a third stage review should be conducted.

Table 2.3 (contd.) Brief details of Stages in the Review and Assessment process

Stage	Objective	Approach	Outcome
<p>Third Stage Review and Assessment</p>	<ul style="list-style-type: none"> • Accurate and detailed assessment of both current and future air quality. Assess the likelihood of the air quality objectives being exceeded. • Identify the geographical boundary of any exceedences, and description of those areas, if any, proposed to be designated as an AQMA. 	<ul style="list-style-type: none"> • Use of validated modelling and quality-assured monitoring methods to determine current and future pollutant concentrations. • The assessment will need to consider all locations where public exposure is relevant. For each pollutant of concern, it may be necessary to construct a detailed emissions inventory and model the extent, location and frequency of potential air quality exceedences. 	<ul style="list-style-type: none"> • Determine the location of any necessary Air Quality Management Areas (AQMAs). Once an AQMA has been identified, there are further sets of requirements to be considered. • A further assessment of air quality in the AQMA is required within 12 months which will enable the degree to which air quality objectives will not be met and the sources of pollution that contribute to this to be determined. A local authority must also prepare a written action plan for achievement of the air quality objective. Both air quality reviews and action plans are to be made publicly available.

Local authorities are expected to have completed review and assessment of air quality by December 2000. A further review will also need to be completed for the purposes of the Act before the target date of 2003.

2.3 LOCATIONS THAT THE REVIEW AND ASSESSMENT MUST CONCENTRATE ON

For the purpose of review and assessment, the authority should focus their work on locations where members of the public are likely to be exposed over the averaging period of the objective. Table 2.4 summarises the locations where the objectives should and should not apply.

Table 2.4 Typical locations where the objectives should and should not apply

Averaging Period	Pollutants	Objectives <i>should</i> apply at ...	Objectives <i>should not</i> generally apply at ...
Annual mean	<ul style="list-style-type: none"> • 1,3 Butadiene • Benzene • Lead • Nitrogen dioxide • Particulate Matter (PM₁₀) 	<ul style="list-style-type: none"> • All background locations where members of the public might be regularly exposed. 	<ul style="list-style-type: none"> • Building facades of offices or other places of work where members of the public do not have regular access.
		<ul style="list-style-type: none"> • Building facades of residential properties, schools, hospitals, libraries etc. 	<ul style="list-style-type: none"> • Gardens of residential properties.
			<ul style="list-style-type: none"> • Kerbside sites (as opposed to locations at the building façade), or any other location where public exposure is expected to be short term
24 hour mean and 8-hour mean	<ul style="list-style-type: none"> • Carbon monoxide • Particulate Matter (PM₁₀) • Sulphur dioxide 	<ul style="list-style-type: none"> • All locations where the annual mean objective would apply. 	<ul style="list-style-type: none"> • Kerbside sites (as opposed to locations at the building façade), or any other location where public exposure is expected to be short term.
		<ul style="list-style-type: none"> • Gardens of residential properties. 	

Table 2.4 (contd.) Typical locations where the objectives should and should not apply

Averaging Period	Pollutants	Objectives should apply at ...	Objectives should generally not apply at ...
1 hour mean	<ul style="list-style-type: none"> • Nitrogen dioxide • Sulphur dioxide 	<ul style="list-style-type: none"> • All locations where the annual mean and 24 and 8-hour mean objectives apply. 	<ul style="list-style-type: none"> • Kerbside sites where the public would not be expected to have regular access.
		<ul style="list-style-type: none"> • Kerbside sites (e.g. pavements of busy shopping streets). 	
		<ul style="list-style-type: none"> • Those parts of car parks and railway stations etc. which are not fully enclosed. 	
		<ul style="list-style-type: none"> • Any outdoor locations to which the public might reasonably be expected to have access. 	
15 minute mean	<ul style="list-style-type: none"> • Sulphur dioxide 	<ul style="list-style-type: none"> • All locations where members of the public might reasonably be expected for a period of 15 minutes or longer. 	

It is unnecessary to consider exceedences of the objectives at any location where public exposure over the relevant averaging period would be unrealistic, and the locations should represent non-occupational exposure.

Key Points

- ◆ The GB Environment Act 1995 has required the development of a National Air Quality Strategy for the control of air quality.
- ◆ A central element in the Strategy is the use of air quality standards and associated objectives based on human health effects that have been included in the Air Quality Regulations.
- ◆ The Strategy uses a local air quality management approach in addition to existing national and international legislation. It promotes an integrated approach to air quality control by the various actors and agencies involved.
- ◆ Air quality objectives, with the exception of ozone, are to be achieved by specified dates up to the end of 2005 (2008 for one lead objective).
- ◆ A number of air quality reviews are required in order to assess compliance with air quality objectives. The number of reviews necessary depends on the likelihood of achieving the objectives.

3 Review and assessment of nitrogen dioxide

3.1 INTRODUCTION

Nitrogen oxides are formed during high temperature combustion processes from the oxidation of nitrogen in the air or fuel. The principal source of nitrogen oxides, nitric oxide (NO) and nitrogen dioxide (NO₂), collectively known as NO_x, is road traffic, which is responsible for approximately half the emissions in Europe. NO and NO₂ concentrations are therefore greatest in urban areas where traffic is heaviest. Other important sources are power stations, heating plant and industrial processes.

Nitrogen oxides are released into the atmosphere mainly in the form of NO, which is then readily oxidised to NO₂ by reaction with ozone. Elevated levels of NO_x occur in urban environments under stable meteorological conditions, when the air mass is unable to disperse.

Nitrogen dioxide has a variety of environmental and health impacts. It is a respiratory irritant, may exacerbate asthma and possibly increase susceptibility to infections. In the presence of sunlight, it reacts with hydrocarbons to produce photochemical pollutants such as ozone. In addition, nitrogen oxides have a lifetime of approximately 1 day with respect to conversion to nitric acid. This nitric acid is in turn removed from the atmosphere by direct deposition to the ground, or transfer to aqueous droplets (e.g. cloud or rainwater), thereby contributing to acid deposition.

3.1.1 Standards and objectives for nitrogen dioxide

The national air quality objectives for NO₂ are:

- An annual average concentration of 40 µg m⁻³ (21 ppb); to be achieved 31st December 2005
- 200 µg m⁻³ (105 ppb) as an hourly average with a maximum of 18 exceedences in a year to be achieved 31st December 2005

Modelling studies suggest that in general achieving the annual mean of 40 µg m⁻³ is more demanding than achieving the hourly objective. If the annual mean is achieved, the modelling suggests the hourly objectives will also be achieved.

3.1.2 The National Perspective

All combustion processes produce some NO_x, but only NO₂ is associated with adverse effects on human health. The main sources of NO_x in the United Kingdom are road transport, which, in 1997 accounted for about half of the emissions, power generation (20%), and domestic sources (4%). In urban areas, the proportion of local emissions due to road transport sources is larger.

The results of the analysis set out in the National Air Quality Strategy suggest that for NO₂ a reduction in NO_x emissions over and above that achievable by national measures will be required to ensure that air quality objectives are achieved everywhere by the end of 2005. Local authorities with


major roads, or highly congested roads, which have the potential to result in elevated levels of NO₂ in relevant locations, are expected to identify a need to progress to the second or third stage review and assessment for this pollutant.

1.23.2 BACKGROUND CONCENTRATIONS OF NITROGEN DIOXIDE

Background concentrations were obtained for the Carrickfergus area using the maps on the UK National Air Quality Information Archive web site

<http://www.aeat.co.uk/netcen/airqual/home.html>. Figure 3.1 shows estimates of NO_x background concentrations for 2005, ranging from averages of below 20µg/m³.

Figure 3.1 Background NO_x concentrations 2005

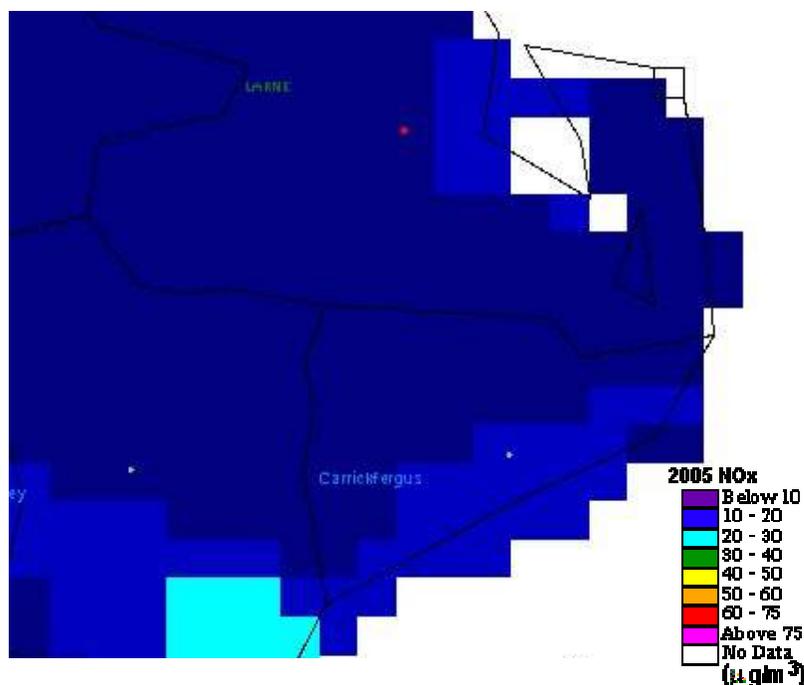

An estimated NO_x background concentration has been taken from the highest value in the dataset to provide a conservative estimate. A background NO_x estimate therefore of 13.7µg/m³ has been estimated for 2005 in the Carrickfergus Borough Council region, that being the highest concentration in the region.

1.33.3 MONITORING OF NITROGEN DIOXIDE

3.3.1 Diffusion tube data

Monthly average concentrations of NO₂ have been measured with diffusion tubes at nine sites in Carrickfergus. The summary results are shown in Table 3.1 and are presented in full in Appendix 1. Many of the monitoring periods are representative of a full year and therefore the period average concentrations can be compared with the annual mean objective. Analysis of the tubes was carried out by the Ruddock and Sherratt Laboratory which was found to have the biases: 1998: -23.8%, 1999: -23.7%, 2000: -13.7%, 2001: -46.5%, relative to an automatic analyser. The projections are then made using correction factors as advised in Pollutant Specific Guidance.

Table 3.1. Annual average concentrations measured at identified receptor locations in the Carrickfergus area (µg/m³).

Location		Annual Means					Annual Means Corrected for Lab Bias					Projection to 2005 from:			
		97	98	99	00	01	98	99	00	01	98	99	00	01	
G'Island 27 Upper Road	k		18.9	15.2	14.6	14.2	23.4	18.8	16.6	20.8	19.6	16.1	14.6	18.9	
G'Island 32 Mullaghmore Park	b		7.4	7.3	7.0	6.5	9.2	9.0	8.0	9.6	7.3	7.4	6.8	8.4	
G'Island Library	b	14.4	6.4				7.9				6.3				
G'Island 59 Shore Road	k		17.9	17.2	16.3	16.1	22.1	21.3	18.6	23.6	18.6	18.3	16.3	21.5	
C'Fergus Railway Stn, Fergus Ave	k	14.4	12.8	12.6	11.3	10.2	15.9	15.6	12.9	14.9	13.3	13.4	11.3	13.5	
C.Fergus College North Road	b	15.4	12.2	11.8	10.5	8.7	15.1	14.6	12.0	12.7	12.0	12.0	10.2	11.2	
W,Head Islandmagee Road	k	11.3	11.9	11.5	8.8	8.1	14.7	14.2	10.1	11.9	12.4	12.2	8.8	10.8	
WHead 28 Bentra Rd	b		5.0	5.4	5.7	5.8	6.2	6.7	6.4	8.5	5.0	5.5	5.5	7.5	
Loughmourne Lough Rd	b	6.1	5.2	4.1	3.8	5.8	6.4	5.0	4.3	8.5	5.1	4.1	3.6	7.5	

K=kerbside 1-5m from a busy road
 I=Intermediate 20-30 m from the same or an equivalent road
 B = background in a residential area more than 50 metres from a busy road.

The NO₂ concentrations recorded with these diffusion tubes do not exceed the annual mean objective of 40 µg/m³ at any of the sites. The government guidance suggests that it is therefore unlikely that the NO₂ annual mean objective will be met by the end of 2005.

3.4 IMPACT OF ROAD TRAFFIC ON CONCENTRATIONS OF OXIDES OF NITROGEN

The Stage one Review and Assessment for Carrickfergus Borough Council identified some road links as needing further study in a Stage two assessment. The concentrations at these roadside locations were estimated using the Design Manual for Roads and Bridges (DMRB) using the traffic flow data provided by Carrickfergus Borough Council. The effect of junctions has been taken into account in DMRB where traffic data have been provided. Traffic flow details are given in Appendix 2. The model has been used to predict nitrogen dioxide concentrations for 2005.

Table 3.2 lists the annual average and 99.8th percentile of maximum hourly average kerbside concentrations (equivalent to 18 exceedences per year) of nitrogen dioxide predicted for 2005 in the Carrickfergus Borough Council area. Following advice given in government guidance LAQM TG4(00), the 99.8th percentile of hourly averages has been estimated as 3.5 times the annual mean for roadside locations.

Table 3.2 Nitrogen dioxide concentrations at roadside locations in the Carrickfergus District

Description of Link	NO2 Annual mean ($\mu\text{g m}^{-3}$) 2005	NO2 99.8th percentile of hourly averages ($\mu\text{g m}^{-3}$)
B90	24.4	85.6
B90/Upper Station Road	30.3	106.2
Albert Rd/A2	28.6	99.9
B90/North Rd	32.3	113.2
B90/Woodburn Rd	25.8	90.5
Davys St	23.0	80.7
A2 Shore Rd	34.1	119.2
A2 Shore Rd/Greenisland Station Rd	38.1	133.4

Note: Greenisland and Upper Station Rd are conservative traffic estimates and are expected to be overpredicting

For 2005, annual average concentrations of nitrogen dioxide are predicted not to exceed $40 \mu\text{g m}^{-3}$ and so at all locations the air quality objectives are predicted to be met.

3.5 IMPACT OF INDUSTRY ON CONCENTRATIONS OF NITROGEN OXIDES

The Stage 1 Review and Assessment for Carrickfergus Borough Council concluded that one Part A authorised processes needed further investigation to determine whether it was necessary to proceed to a Stage 3 Review and Assessment. The industry identified was:

- Kilroot Power station.

The profile of Kilroot power station made it suitable to be entered into GSS (Guidance for estimating the Air Quality Impact of Stationary Sources) as advised by the GB Government Pollutant Specific Guidance. The data used to model the emissions of Kilroot in GSS were obtained from the National Atmospheric Emissions Inventory for 1999.

Table 3.3 Kilroot GSS Data

Operator	Nigen
Location	Kilroot
Stack Height (m)	200
Stack Diameter (m)	5.5
Stack Velocity (m/s)	17.64
Stack Temperature °C	120
Easting	154500
Northing	541000
1999 NO _x t/a	7058
1999 NO _x g/sec	223.8
NO ₂ Annual Mean µg/m ³ (2.6 km from stack)	10

For nitrogen dioxide the annual mean predicted at is well below the objective of 40 µg/m³ and therefore is predicted not to cause an exceedance.

3.6 CONCLUSIONS FOR NITROGEN DIOXIDE CONCENTRATIONS IN THE CARRICKFERGUS BOROUGH COUNCIL AREA

Emissions from industrial sources are not predicted to lead to an exceedance of the nitrogen dioxide objectives in 2005. Emissions arising from road transport in Carrickfergus are also unlikely to cause an exceedance of the objective. In addition, diffusion tubes show that concentrations at these roadside locations show concentrations to be within the limits of the objective.

It is therefore recommended that a Stage 3 Review and Assessment is not necessary for this pollutant.

4 Review and assessment of PM₁₀

4.1 INTRODUCTION

Airborne particulate matter varies widely in its physical and chemical composition, source and particle size. Particles are often classed as either primary (those emitted directly into the atmosphere) or secondary (those formed or modified in the atmosphere from condensation and growth). PM₁₀ particles (the fraction of particulates in air of very small size, <10 µm aerodynamic diameter) can potentially pose significant health risks as they are small enough to penetrate deep into the lungs. Larger particles are not readily inhaled.

A major source of fine primary particles is combustion processes, in particular diesel combustion, where transport of hot exhaust vapour into a cooler tailpipe or stack can lead to spontaneous nucleation of “carbon” particles before emission. Secondary particles are typically formed when low volatility products are generated in the atmosphere, for example the oxidation of sulphur dioxide to sulphuric acid. The atmospheric lifetime of particulate matter is strongly related to particle size, but may be as long as 10 days for particles of about 1 µm in diameter.

Concern about the potential health impacts of PM₁₀ has increased very rapidly over recent years. Increasingly, attention has been turning towards monitoring the smaller particle fraction, PM_{2.5}, which is capable of penetrating deepest into the lungs, or to even smaller size fractions or total particle numbers.

4.1.1 Standards and objectives for particulate matter

The Air Quality Strategy objectives to be achieved by 31st December 2004 are:

- An annual average concentration of 40 µg m⁻³ (gravimetric);
- A maximum 24-hourly mean concentration of 50 µg m⁻³ (gravimetric) not to be exceeded more than 35 times a year.

4.1.2 The National Perspective

National UK emissions of primary PM₁₀ have been estimated as totalling 184,000 tonnes in 1997. Of this total, around 25% was derived from road transport sources. It should be noted that, in general, the emissions estimates for PM₁₀ are less accurate than those for the other pollutants with prescribed objectives, especially for sources other than road transport.


The Government established the Airborne Particles Expert Group (APEG) to advise on sources of PM₁₀ in the UK and current and future ambient concentrations. Their conclusions were published in January 1999 (APEG, 1999)⁵. APEG concluded that a significant proportion of the current annual average PM₁₀ is due to the secondary formation of particulate sulphates and nitrates, resulting from the oxidation of sulphur and nitrogen oxides. These are regional scale pollutants and the annual concentrations do not vary greatly over a scale of tens of kilometres. There are also natural or semi-natural sources such as wind-blown dust and sea salt particles. The impact of local urban sources is superimposed on this regional background. Such local sources are generally responsible for winter

episodes of hourly mean concentrations of PM₁₀ above 100 µg m⁻³ associated with poor dispersion. However, it is clear that many of the sources of PM₁₀ are outside the control of individual local authorities and the estimation of future concentrations of PM₁₀ are in part dependent on predictions of the secondary particle component.

4.2 BACKGROUND CONCENTRATIONS OF PM₁₀

Estimates of background concentrations of PM₁₀ were obtained for the Carrickfergus Borough Council area using the maps on the UK National Air Quality Information Archive web site <http://www.aeat.co.uk/netcen/airqual/home.html>. Figure 4.1 shows that the estimated annual average background concentration for 2004 in Carrickfergus was 22.5 µg/m³ or lower.

Figure 4.1 Background PM₁₀ concentrations 2004 (µg m⁻³)

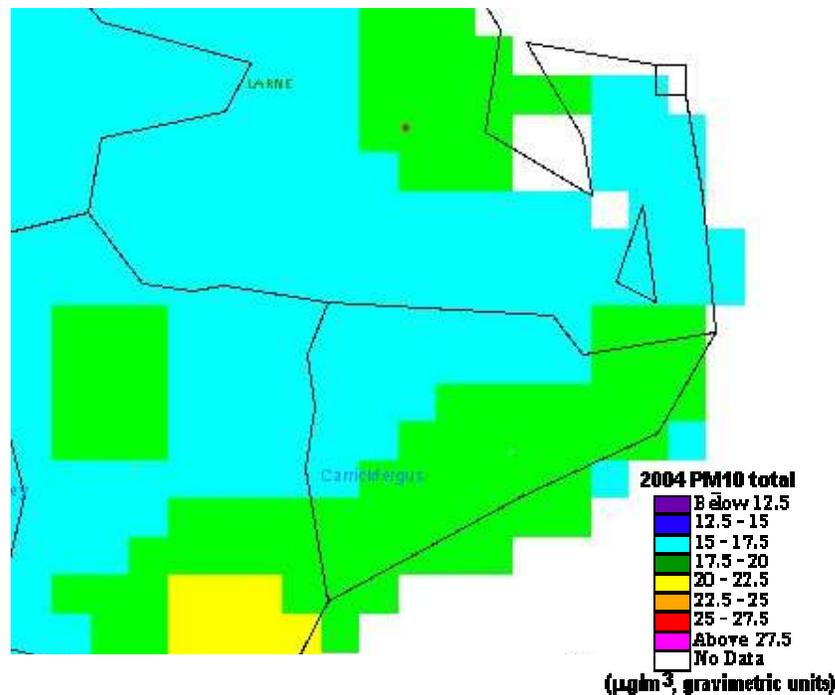

4.3 IMPACT OF ROAD TRAFFIC ON PM₁₀

4.3.1 Prediction for 2004

As recommended in GB Government guidance LAQM.TG4 (00) DMRB has been used to predict PM₁₀ concentrations for 2004 from road traffic. An estimated maximum background concentration for 2004 of 19.2 µg m⁻³ for Carrickfergus has been used, taken from the highest value in the mapped dataset. Estimated traffic flows for 2004 and 2005 have been used based upon traffic count data supplied and with a 3% growth factor applied per year as a conservative estimate.

GB Government Guidance LAQM.TG4(00) states that the 24-hour objective is highly unlikely to be exceeded if the annual mean concentration is below 28 µg m⁻³, gravimetric.

Table 4.1 shows the 2004 predictions that may be compared against the objectives. For 2004, the method predicts annual average concentrations of PM₁₀ less than 28 µg m⁻³ at all of the locations modelled.

Table 4.1 Predicted PM₁₀ concentrations at roadside locations in the Carrickfergus Borough Council region.

Description of Link	PM10 Annual mean (µg m-3) 2004
B90	20.4
B90/Upper Station Road	20.8
Albert Rd/A2	20.8
B90/North Rd	21.1
B90/Woodburn Rd	20.5
Davys St	20.3
A2 Shore Rd	21.5
A2 Shore Rd/Greenisland Station Rd	21.7

Note: Greenisland and Upper Station Rd are conservative traffic estimates and are expected to be overpredicting

4.4 CONCLUSIONS FOR PM₁₀ CONCENTRATIONS IN THE CARRICKFERGUS BOROUGH COUNCIL AREA

Emissions from traffic and combustion sources are not predicted to lead to an exceedence of the PM₁₀ objectives in 2004. Therefore it is not recommended to proceed to a Stage 3 Review and Assessment.

5 Review and assessment of sulphur dioxide

5.1 INTRODUCTION

Sulphur dioxide is a corrosive acid gas which combines with water vapour in the atmosphere to produce acid rain. Both wet and dry deposition have been implicated in the damage and destruction of vegetation and in the degradation of soils, building materials and watercourses. SO₂ in ambient air is also associated with asthma and chronic bronchitis.

The principal source of this gas is power stations burning fossil fuels which contain sulphur. Episodes of high concentrations of SO₂ now only tend to occur in cities in which coal is still widely used for domestic heating, in industry and in power stations. As some power stations are now located away from urban areas, SO₂ emissions may affect air quality in both rural and urban areas. Since the decline in domestic coal burning in cities and in power stations overall, SO₂ emissions have diminished steadily and, in most European countries, they are no longer considered to pose a significant threat to health.

5.1.1 Standards and objectives for sulphur dioxide

Two new objectives have been introduced for SO₂ in the AQS based on the limit values in the Air Quality Daughter Directive, and the three objectives are:

- 266 µg m⁻³ as a 15 minute mean (maximum of 35 exceedences a year or equivalent to the 99.9th percentile) to be achieved by the 31st December 2005
- 350 µg m⁻³ as a 1 hour mean (maximum of 24 exceedences a year or equivalent to the 99.7th percentile) to be achieved by the 31st December 2004
- 125 µg m⁻³ as a 24 hour mean (maximum of 3 exceedences a year or equivalent to the 99th percentile) to be achieved by the 31st December 2004

The 15 minute mean objective is the most stringent; the other two objectives will not be exceeded if this objective is not exceeded.

5.1.2 The National Perspective

Sulphur dioxide is emitted in the combustion of coal and oil. Emissions today are dominated by fossil-fuelled power stations which in 1997 accounted for 62% of the national total emission. Emissions from road transport are a very small fraction of the national total: 2%.


Exceedences of the 15-minute air quality standard currently occur near industrial processes for which the stack heights were designed to meet previous air quality standards and downwind of large combustion plant such as power stations. Exceedences are also possible in areas where significant quantities of coal are used for space heating. These large combustion plant are currently regulated under BATNEEC and the EPA 1990, and will come under the provisions of the IPPC. The government considers that bearing in mind the envisaged change in fuel use, it does not expect exceedences of the 15-minute objective by 2005 from these sources. Sulphur dioxide concentrations

are elevated at the kerbside but not sufficiently to exceed the air quality standard in the absence of other sources.

5.2 BACKGROUND CONCENTRATIONS OF SULPHUR DIOXIDE

Estimates of background concentrations of sulphur dioxide were obtained for the Carrickfergus Borough area using the maps on the UK National Air Quality Information Archive web site <http://www.aeat.co.uk/netcen/airqual/home.html>. Figure 5.1 shows the most recent estimates available for 1996. The estimated annual average concentration for 1996 in the Carrickfergus Borough Council area was below $16 \mu\text{g m}^{-3}$. GB Government Guidance LAQM.TG4(00) assumes that the annual mean at the end of 2004 and 2005 will be half the 1996 annual mean, however because of the high coal burning nature of the region it has been decided to assume the annual mean at the end of 2004 and 2005 will be $\frac{3}{4}$ the 1996 annual mean.. Thus the estimated annual mean background concentration in the Carrickfergus Borough Council area in 2004 will be $12 \mu\text{g m}^{-3}$.

Figure 5.1 Background SO₂ concentrations 1996

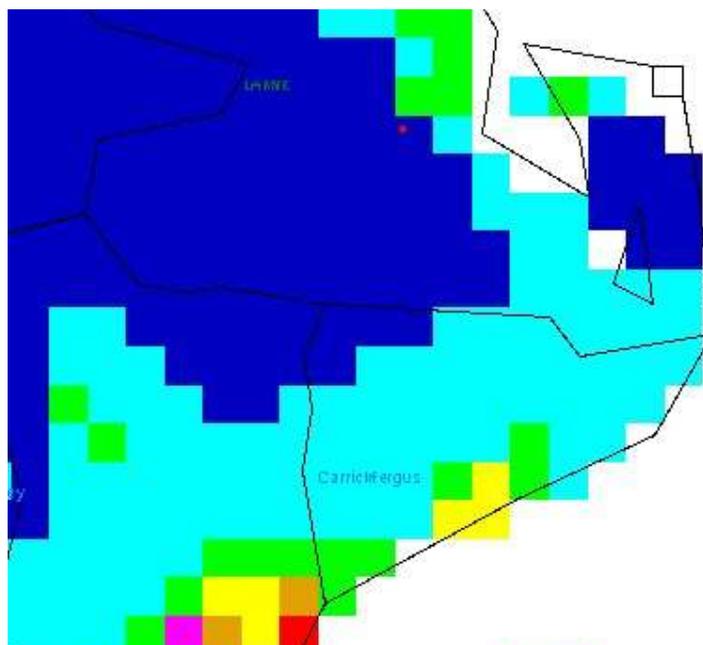

1.25.3 MONITORING OF SULPHUR DIOXIDE

There is SO₂ monitoring carried out in Carrickfergus at 2 sites. The data is summarised in Table 5.1.

Table 5.1 Sulphur dioxide concentrations at locations in the Carrickfergus District

Location	Annual Average $\mu\text{g/m}^3$			
	1997	1998	1999	2000
C.Fergus Town Hall	8.6	5.9	5.2	5.4
Loughmourne Lough Rd	6.8	4.1	2.1	3.2

The data are presented here do show very low concentrations of sulphur dioxide at their locations although sulphur dioxide diffusion tube measurements have limited application in the review and assessment process because the Strategy objectives are for short-term exposure.

5.4 IMPACT OF INDUSTRY ON CONCENTRATIONS OF SULPHUR DIOXIDE

The Stage 1 Review and Assessment Report prepared by Carrickfergus Borough Council stated that there was one Part A process in the area that has the potential to emit significant quantities of sulphur dioxide.

- Kilroot Power Station

Therefore Kilroot power station was assessed using GSS (Guidance for estimating the Air Quality Impact of Stationary Sources) as advised by the GB Government Pollutant Specific Guidance. The data used to model the emissions of Kilroot in GSS were obtained from the National Atmospheric Emissions Inventory for 1999.

Table 5.2 Kilroot GSS Data

Operator	Nigen
Location	Kilroot
Stack Height (m)	200
Stack Diameter (m)	5.5
Stack Velocity (m/s)	17.64
Stack Temperature °C	120
Easting	154500
Northing	541000
1999 SO ₂ t/a	16702
1999 SO ₂ g/sec	529.6
SO ₂ 15 minute objective µg/m ³	176.7

It can be seen that the 15 minute objective is predicted to be met as the power station predicts a maximum 15 minute mean of 176.7 µg/m³ and this is below the objective of 266 µg/m³. It has been shown therefore that there will not be an exceedance of the sulphur dioxide objectives as the 15 minute mean objective will be met which is the most stringent of the three sulphur dioxide objectives.

5.5 CONCLUSIONS FOR SULPHUR DIOXIDE CONCENTRATIONS IN THE CARRICKFERGUS BOROUGH COUNCIL AREA

It is concluded that industrial sources of sulphur dioxide in the Carrickfergus Borough Council area are likely to meet the air quality objective and therefore no further review and assessment of these is required at this time.

6 Conclusions and recommendations for each pollutant

6.1 NITROGEN DIOXIDE

Emissions from industrial sources are not predicted to lead to an exceedence of the nitrogen dioxide objectives in 2005. Emissions arising from road transport in Carrickfergus are unlikely to cause an exceedence of the AQS. In addition, diffusion tubes show that concentrations at these roadside locations show concentrations to be within the limits of the objective.

It is therefore recommended that **a Stage 3 Review and Assessment is not necessary for this pollutant.**

6.2 PARTICULATE MATTER (PM₁₀)

Emissions from traffic and industrial sources are not predicted to lead to an exceedence of the PM₁₀ objectives in 2004. Therefore it is recommended that **it is not necessary to proceed to a Stage 3 Review and Assessment.**

6.3 SULPHUR DIOXIDE

There were no predicted exceedences of the GB objectives for sulphur dioxide from industrial sources in the Carrickfergus Borough Council region. **It is not necessary to proceed to a Stage 3 Review and Assessment.**

7 References

DETR (2000) The Air Quality Strategy for England, Scotland, Wales and Northern Ireland. Department of the Environment, Transport and the Regions. Cm 4548, SE 2000/3, NIA 7.

Review and Assessment : Pollutant Specific Guidance LAQM TG4(00) ISBN 1 85112 387 3 DETR May 2000

The Air Quality (England) Regulations 2000 DETR April 2000

EA (1998b) Guidance for estimating the air quality impact of stationary sources. Guidance Note 24.

APEG (1997) Source apportionment of airborne particulate matter in the United Kingdom. Report of the Airborne Particles Expert Group.

Abbott, J. and Vincent, K. (1999) Dispersion modelling of SO₂ concentrations in the United Kingdom for comparison with the National Air Quality Strategy. A report produced for the Department of the Environment, Transport and the Regions. AEAT-5120 Issue 1. AEA Technology Environment, Culham, Abingdon, Oxon., OX14 3ED.

Bush (2000). Summary results from the UK NO₂ network field inter comparison exercise 1999. A report produced for the Department of the Environment, Transport and the Regions, the Welsh office, the Scottish office and the Department of the Environment for Northern Ireland. AEA Technology Plc.

Stedman, JR, Bush, TJ, Murrells, TP and King K (2001). Baseline PM10 and NOx projections for PM10 objective analysis. AEA Technology, National Environmental Technology Centre. Report AEAT/ENV/R/0728

Clarke, RH. A model for short and medium range dispersion of radionuclides released to the atmosphere. A first report of a working group on atmospheric dispersion. NRPB – R91. National Radiological Protection Board, Harwell, Didcot. September 1979.

Appendices

CONTENTS

- Appendix 1 Local air quality monitoring data
- Appendix 2 Traffic flow map from Carrickfergus Arcview Project (actual speeds obtained from the ArcView data file)

Appendix 1

Appendix 1 Local air quality monitoring data

Site Nos	Site Typ	Gas Monitored	Location	units	Jan-97	Feb-97	Mar-97	Apr-97	May-97	Jun-97	Jul-97	Aug-97	Sep-97	Oct-97	Nov-97	Dec-97
9.0	K	NO2	G'Island 27 Upper Road	µg/m ³												
1.0	U	NO2	G'Island 32 Mullaghmore Park	µg/m ³												
1.1	U	NO2	G'Island Library	µg/m ³			10.3							14.3	18.9	14.1
10.0	K	NO2	G'Island 59 Shore Road	µg/m ³												
3.0	I	NO2	C'Fergus Railway Stn, Fergus Ave	µg/m ³			13.2	10.7	10.5	9.7	11.7	9.4	16.0	16.0	32.3	
2.0	U	NO2	C,Fergus College North Road	µg/m ³			12.4	17.0	20.4	14.3	15.3	12.8	12.4	13.9	19.5	15.7
5.0	K	NO2	W,Head Islandmagee Road	µg/m ³			11.7	10.7	10.3	8.6	8.8		10.5	10.1	16.4	14.3
11.0	R	NO2	W'Head 28 Bentra Rd	µg/m ³												
7.0	R	NO2	Loughmourne Lough Rd	µg/m ³			6.5	5.0	3.4	4.8	5.2	5.5	5.0	7.1	9.7	9.2
8.0		SO2	C.Fergus Town Hall	µg/m ³			12.0	5.3	5.1	13.6	6.9	6.9	6.9	10.9	9.8	8.8
6.0		SO2	Loughmourne Lough Rd	µg/m ³			5.3	4.0	5.6	22.9	6.9	2.1	6.4	6.1	1.6	6.9

Site Nos	Site Typ	Gas Monitored	Location	units	Jan-98	Feb-98	Mar-98	Apr-98	May-98	Jun-98	Jul-98	Aug-98	Sep-98	Oct-98	Nov-98	Dec-98
9.0	K	NO2	G'Island 27 Upper Road	µg/m ³								16.2	18.5	15.9	23.3	20.4
1.0	U	NO2	G'Island 32 Mullaghmore Park	µg/m ³		9.6	7.6	5.3		5.9	4.0	5.7	8.4	6.3	8.8	12.2
1.1	U	NO2	G'Island Library	µg/m ³	12.8											0.0
10.0	K	NO2	G'Island 59 Shore Road	µg/m ³				0.0				19.3	22.2		23.3	24.6
3.0	I	NO2	C'Fergus Railway Stn, Fergus Ave	µg/m ³	17.6	16.0		9.0	0.0	10.9	7.4	10.3	20.6	12.6	18.1	18.3
2.0	U	NO2	C,Fergus College North Road	µg/m ³	14.9	16.4	11.8	10.1	13.6	11.7	6.3		12.6	10.9	12.2	13.9
5.0	K	NO2	W,Head Islandmagee Road	µg/m ³	12.8			8.2	11.7	12.6	7.4	9.4		18.0	12.6	14.5
11.0	R	NO2	W'Head 28 Bentra Rd	µg/m ³										0.0	6.9	8.2
7.0	R	NO2	Loughmourne Lough Rd	µg/m ³	7.1	7.1	4.8	3.6	4.6	4.0	3.1	4.2	4.4	5.3	7.1	7.3
8.0		SO2	C.Fergus Town Hall	µg/m ³	12.5	10.4	6.7	6.9	6.1	0.0	0.0	2.1	4.8	5.9	6.7	9.3
6.0		SO2	Loughmourne Lough Rd	µg/m ³	9.6	8.2	0.8	5.3	3.7	2.9	1.9	3.2	3.5	1.3	4.8	3.5

Site Nos	Site Typ	Gas Monitored	Location	units	Jan-99	Feb-99	Mar-99	Apr-99	May-99	Jun-99	Jul-99	Aug-99	Sep-99	Oct-99	Nov-99	Dec-99
9.0	K	NO2	G'Island 27 Upper Road	µg/m ³	20.6		10.3	15.9	17.6	17.2	16.4		18.5	14.5	7.4	13.2
1.0	U	NO2	G'Island 32 Mullaghmore Park	µg/m ³	9.4	9.9	5.5	5.9	3.6	7.1	6.1	6.9	8.8	4.2	10.5	9.6
1.1	U	NO2	G'Island Library	µg/m ³												
10.0	K	NO2	G'Island 59 Shore Road	µg/m ³	24.6	15.3	8.0	16.6	13.0	19.7	16.8	20.6	17.4	14.5	21.0	19.3
3.0	I	NO2	C'Fergus Railway Stn, Fergus Ave	µg/m ³	20.8	12.8	9.0		9.4	10.1	11.7	10.7	14.5	9.2	16.6	14.1
2.0	U	NO2	C,Fergus College North Road	µg/m ³	16.4	10.3			9.7	12.4	12.2	12.8	13.0	7.1	14.5	9.6
5.0	K	NO2	W,Head Islandmagee Road	µg/m ³	16.8	13.2	5.7	8.2		10.7	9.2	21.0	9.9	9.7	12.6	9.4
11.0	R	NO2	W'Head 28 Bentra Rd	µg/m ³	9.6	2.1	5.7	4.8	1.9	5.2	5.5		6.1	6.3	5.0	7.3
7.0	R	NO2	Loughmourne Lough Rd	µg/m ³	7.1	0.4	2.9	0.0	1.9	5.3	4.4	5.9	5.3	6.3	5.0	4.2
8.0		SO2	C.Fergus Town Hall	µg/m ³	10.9	8.2	2.4	4.5	3.5	2.7	2.7	2.7	3.2	7.7	7.4	6.1
6.0		SO2	Loughmourne Lough Rd	µg/m ³	2.7	2.1	0.8	2.7	0.8	1.9	1.9	1.9	3.7	1.9	1.3	4.0

Site Nos	Site Typ	Gas Monitored	Location	units	Jan-00	Feb-00	Mar-00	Apr-00	May-00	Jun-00	Jul-00	Aug-00	Sep-00	Oct-00	Nov-00	Dec-00
9.0	K	NO2	G'Island 27 Upper Road	µg/m ³	11.1	10.7	12.4	13.2		14.9	13.9	17.4	20.1	17.4	11.8	18.0
1.0	U	NO2	G'Island 32 Mullaghmore Park	µg/m ³	8.2	9.2	6.3		5.3	5.2	5.7	7.1	8.6	8.8	7.1	5.5
1.1	U	NO2	G'Island Library	µg/m ³												
10.0	K	NO2	G'Island 59 Shore Road	µg/m ³	13.2	18.5	13.0	16.6		14.1	13.4	18.5	16.6	19.9	14.1	21.6
3.0	I	NO2	C'Fergus Railway Stn, Fergus Ave	µg/m ³	12.2	12.0	9.4	9.6	9.2		8.2	10.1	17.8	16.0	9.4	10.9
2.0	U	NO2	C,Fergus College North Road	µg/m ³	10.7	8.8	6.3	12.2	9.2	9.9	11.8	11.3	13.9	11.8	9.2	11.1
5.0	K	NO2	W,Head Islandmagee Road	µg/m ³	11.5	12.0	8.2	7.3	8.2	9.0	7.3	9.4	11.8	5.7	8.0	7.8
11.0	R	NO2	W'Head 28 Bentra Rd	µg/m ³	4.2	7.3	2.5	2.1	3.2	9.6	4.4	5.0	8.8	9.0	5.7	6.1
7.0	R	NO2	Loughmourne Lough Rd	µg/m ³	3.2	5.2	1.3	4.8	3.6	4.2	4.0	0.6	6.3	5.5	2.7	
8.0		SO2	C.Fergus Town Hall	µg/m ³	7.4	7.7	5.3	0.0	0.0	4.0	3.7	13.0	6.1	5.9	5.9	
6.0		SO2	Loughmourne Lough Rd	µg/m ³	3.2	5.1	0.5	0.0	0.0	2.9	2.7	15.2	2.4	1.6	1.9	

Site Nos	Site Type	Gas Monitored	Location	units	Jan-01	Feb-01	Mar-01	Apr-01	May-01	Jun-01	Jul-01	Aug-01	Sep-01	Oct-01	Nov-01	Dec-01
9.0	K	NO2	G'Island 27 Upper Road	µg/m ³	16.4	15.3	11.5	8.6	13.2	13.6	9.9	17.2	15.9	16.0	18.7	
1.0	U	NO2	G'Island 32 Mullaghmore Park	µg/m ³	7.4	7.1	6.5	3.8	4.8	6.1	4.2	8.8	6.5	8.0	8.8	
1.1	U	NO2	G'Island Library	µg/m ³												
10.0	K	NO2	G'Island 59 Shore Road	µg/m ³	30.6	9.0	8.6	16.8	16.0	9.4	17.6	17.2	14.1	22.2		
3.0	I	NO2	C'Fergus Railway Stn, Fergus Ave	µg/m ³	12.2	8.2	4.8	8.4	9.4	7.8	11.8	9.9	14.5	14.7		
2.0	U	NO2	C,Fergus College North Road	µg/m ³	9.6	7.4	5.5	8.4	8.6	7.4	11.5	6.9	11.3	10.3		
5.0	K	NO2	W,Head Islandmagee Road	µg/m ³	8.0	4.8	4.2	7.6	8.8	7.6	9.2	7.8	11.7	11.3		
11.0	R	NO2	W'Head 28 Bentra Rd	µg/m ³	7.3	5.3	2.5	3.8	4.6	3.8	9.2	5.7	9.6	6.3		
7.0	R	NO2	Loughmourne Lough Rd	µg/m ³	5.7	3.4	2.5	3.8	4.8	7.1	14.9	4.4	6.1	5.2		
8.0		SO2	C.Fergus Town Hall	µg/m ³												
6.0		SO2	Loughmourne Lough Rd	µg/m ³												

Appendix 2

CONTENTS

Appendix 2	Traffic flow map from Carrickfergus Arcview Project (actual speeds obtained from the ArcView data file)
------------	---

